

Gear hobs — Accuracy requirements

ICS 21.200

National foreword

This British Standard is the UK implementation of ISO 4468:2009, incorporating corrigendum November 2009. It supersedes BS 5221:1987 which is withdrawn.

The start and finish of text introduced or altered by corrigendum is indicated in the text by tags. Text altered by ISO corrigendum November 2009 is indicated in the text by **AC1** **AC1** .

The UK participation in its preparation was entrusted to Technical Committee MCE/5/-/3, Gear forming tools.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 31 January 2010
© BSI 2010

Amendments/corrigenda issued since publication

Date	Comments

ISBN 978 0 580 53948 0

Licensed Copy: athen reading, Reading University Library, 24/01/2010 04:30, Uncontrolled Copy, (c) BSI



BS ISO 4468:2009

INTERNATIONAL STANDARD

ISO 4468

Second edition
2009-06-01

Gear hobs — Accuracy requirements

Fraises-mères — Exigences d'exactitude



Reference number
ISO 4468:2009(E)

© ISO 2009

PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.



COPYRIGHT PROTECTED DOCUMENT

© ISO 2009

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

Page

Foreword.....	iv
1 Scope	1
2 Normative references	1
3 Terms and definitions.....	2
4 Accuracy requirements	4
5 Derivation of allowable values	5
5.1 General.....	5
5.2 Tests 1-7	5
5.3 Tests 9, 11, 11A, 12, 12A	6
5.4 Test 9B	6
5.5 Tests 8, 8A, 9B, 10, 13, 14, 15 and 16.....	6
Bibliography	32

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 4468 was prepared by Technical Committee ISO/TC 60, *Gears*, Subcommittee SC 1, *Nomenclature and wormgearing*.

This second edition cancels and replaces the first edition (ISO 4468:1982), which has been technically revised.

Gear hobs — Accuracy requirements

1 Scope

This International Standard specifies requirements for the accuracy of general-purpose hobs of 0,5 module to 40 module.

These hobs are intended for producing gears which conform to ISO 53 and ISO 54.

This International Standard applies to hobs for spur and helical gears. It applies to solid (monobloc) and inserted blade hobs.

The elemental features of hobs are graded according to accuracy, as follows:

- Grade 4A;
- Grade 3A;
- Grade 2A;
- Grade A;
- Grade B;
- Grade C;
- Grade D.

Grade 4A is the highest order of precision.

In addition to the elemental tests for hobs, this International Standard gives permitted tolerances for composite tests that are taken along the cutting edges on the line of action. The two groups of tests are not equivalent and one shall choose between one or the other. If there was no previous agreement, the hob is regarded as belonging to the precision class specified if it satisfies one or the other of the two methods of inspection.

NOTE The tolerances in this International Standard were determined for gear hobs whose dimensions conform to ISO 2490, but with certain precautions they can be applied to hobs not specified in this International Standard.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 53, *Cylindrical gears for general and heavy engineering — Standard basic rack tooth profile*

ISO 54, *Cylindrical gears for general engineering and for heavy engineering — Modules*

ISO 286-2, *ISO system of limits and fits — Part 2: Tables of standard tolerance grades and limit deviations for holes and shafts*

ISO 1122-1, *Vocabulary of gear terms — Part 1: Definitions related to geometry*

ISO 2490, *Solid (monobloc) gear hobs with tenon drive or axial keyway, 0,5 to 40 module — Nominal dimensions*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 1122-1 and the following apply.

3.1

radial runout of hub diameter

total deviation in radial distance of the hub periphery from the axis

3.2

axial runout of hub face

total axial deviation of the hub face from a true plane of rotation

3.3

radial runout of tips of teeth

total deviation in the radial distance from the axis to the tips of the hob teeth

3.4

straightness and radial alignment over cutting depth

angular relationship between the tooth face and a radial line intersecting the tooth face at the hob outside diameter, measured in a plane perpendicular to the axis

3.5

adjacent spacing of cutting face of gashes

maximum deviation between any two consecutive cutting face measurements

3.6

total spacing of cutting face of gashes

maximum deviation between any two cutting face measurements

3.7

gash lead deviation per 100 mm

maximum deviation as the probe contacts the tooth faces within axial region of the gash

NOTE Allowable values for deviations are given per 100 mm of cutting face width.

3.8

tooth profile deviation

maximum deviation of that portion of the hob tooth that generates an unmodified involute profile

3.8.1

tooth profile deviation when line of action test is used

maximum deviation of that portion of the hob tooth that generates an unmodified involute profile when the line of action test is used

NOTE Test 8A is used for tooth profile deviation when the line of action test is used.

3.9

tooth thickness

normal tooth thickness difference of actual and reference datum at the reference cylinder

NOTE Negative only.

3.9.1

addendum

difference of addendum values related to designed normal tooth thickness observed during testing

NOTE Positive only. Test 9A is used for addendum.

3.9.2

tooth thickness difference along one gash

difference between maximum and minimum nominal tooth thickness along one gash at the reference cylinder

NOTE Test 9B is used for tooth thickness difference along one gash. This test is only valid for quality Grades 4A, 3A and 2A.

3.10

lead deviation on adjacent teeth

maximum lead deviation between any two consecutive teeth

3.11

lead deviation in one axial pitch

maximum deviation between any two teeth within any group of consecutive teeth contained in one axial pitch; the number of teeth in one axial pitch is the number of teeth encountered by the measurement probe as it moves parallel to the reference axis during lead testing for a distance of one axial pitch of the hob

NOTE The number of teeth is determined by the number of gashes, the number of threads and, in the case of helical gash hobs, the gash lead.

3.11.1

lead deviation in one axial pitch when line of action test is used

maximum deviation between any two teeth within any group of consecutive teeth contained in one axial pitch when the line of action test is used

NOTE Test 11A is used for lead deviation in one axial pitch when the line of action test is used.

3.12

lead deviation in three axial pitches

maximum lead deviation between any two teeth contained in three axial pitches; the number of teeth in three axial pitches is that number of teeth encountered by the measurement probe as it moves parallel to the reference axis during lead testing for a distance of three axial pitches of the hob

NOTE The number of teeth is determined by the number of gashes, the number of threads and, in the case of helical gash hobs, the gash lead.

3.12.1

lead deviation in three axial pitches when line of action test is used

maximum lead deviation between any two teeth contained in three axial pitches when the line of action test is used

NOTE Test 12A is used for lead deviation in three axial pitches when the line of action test is used.

3.13**adjacent deviation along line of action**

maximum deviation between any two consecutive teeth of a given line of action test

NOTE 1 Adjacent hob line of action allowable deviation can be applied to adjacent line of action test results in those cases where the hob has been specified to be manufactured with involute helicoid geometry.

NOTE 2 Adjacent deviation along the line of action is measured at the cutting edge.

3.14**total deviation along line of action**

total maximum deviation between any two teeth of a given line of action test

NOTE 1 Total hob line of action allowable deviation can be applied to total line of action test results in those cases where the hob has been specified to be manufactured with involute helicoid geometry.

NOTE 2 Total deviation along the line of action is measured at the cutting edge.

3.15**axial pitch deviation from thread to thread**

maximum axial pitch deviation between any two consecutive teeth contained within two gashes

NOTE 1 For an odd number of threads, the angle between the gashes is approximately 90°. For an even number of threads, it is approximately 120°.

NOTE 2 The minimum requirement is to inspect the number of axial pitches equal to the number of threads.

3.16**axial pitch deviation in any three axial pitches over all threads**

maximum axial pitch deviation over any three adjacent teeth contained within two gashes

NOTE 1 For an odd number of threads, the angle between the gashes is approximately 90°. For an even number of threads, it is approximately 120°.

NOTE 2 The minimum requirement is to inspect the number of axial pitches equal to the number of threads.

4 Accuracy requirements

Hobs shall conform to the requirements of Tables 2 and 4, as appropriate.

When prior agreement between the hob manufacturer and purchaser specifies measurement of hobs, the manufacturer should select:

- the measurement method to be used from among the applicable methods described in this International Standard and summarized in Table 1;
- the piece of measurement equipment to be used by the selected measurement method, provided it is in proper calibration;
- the individual teeth to be measured, as long as they are approximately equally spaced.

No particular method of measurement or documentation is considered mandatory. When applications require measurements beyond those recommended in this International Standard, it is recommended to negotiate special measurement methods prior to manufacturing the hob.

Table 1 — Reference for measurement methods

Test method definition	Test description	Test number ^a	
		Elemental test	Composite test ^b
3.1	Radial runout of hub diameter	1	1
3.2	Axial runout of hub face	2	2
3.3	Radial runout of tips of teeth	3	3
3.4	Straightness and radial alignment over cutting depth	4	4
3.5	Adjacent spacing of cutting face of gashes	5	5
3.6	Total spacing of cutting face of gashes	6	6
3.7	Gash lead deviation per 100 mm	7	7
3.8	Tooth profile deviation	8	8A
3.9	Tooth thickness	9 or 9A and 9B	9 or 9A and 9B
3.10	Lead deviation on adjacent teeth	10	10
3.11	Lead deviation in one axial pitch	11	11A
3.12	Lead deviation in three axial pitches	12	12A
3.13	Adjacent deviation along line of action (measured at the cutting edge)	— ^c	13
3.14	Total deviation along line of action (measured at the cutting edge)	— ^c	14
3.15	Axial pitch deviation from thread to thread	15	15
3.16	Axial pitch deviation in any three axial pitches over all threads	16	16
^a See Clause 5. ^b Select the composite test when the line of action test is used. ^c Test does not apply to the elemental method.			

5 Derivation of allowable values

5.1 General

Test 7 does not conform to a datum value and is not among the statements in Clause 5 concerning grade relationships.

With the exception of Test 7, the datum from which all the values in Table 6 are derived is the value of 45 µm Test 14 Grade A modules 16 to 25.

5.2 Tests 1-7

For tests 1 to 7, use Equation (1):

$$\text{Calculated value} = 45 K_e K_m K_g \quad (1)$$

K_t is not used.

5.3 Tests 9, 11, 11A, 12, 12A

For tests 9, 11, 11A, 12, 12A, use Equation (2):

$$\text{Calculated value} = 45 K_e K_m K_g K_t \quad (2)$$

where

K_e is the ratio for test element (see Table 3);

K_m is the ratio for division of module (see Table 4);

K_g is the ratio for grade (see Table 3);

K_t is the ratio for number of threads (see Table 5).

5.4 Test 9B

Test 9B is only valid for quality Grades 4A, 3A and 2A.

5.5 Tests 8, 8A, 9B, 10, 13, 14, 15 and 16

Tests 8, 8A, 9B, 10, 13, 14, 15 and 16 are only valid for the following:

- a) 1-thread, all Module ranges;
- b) 2-threads, Module range $0,5 \leq m \leq 16$;
- c) 3- and 4-threads, Module range $0,5 \leq m \leq 6$;
- d) 5-, 6- and 7-threads, Module range $0,5 \leq m \leq 3,5$.

The value of the allowable deviations has been rounded to the nearest whole value after calculation. The minimum value of allowable deviations is 2 μm .

Standard bores shall be finished straight and parallel within the tolerances given in Table 2 for 75 % of each bearing length for Grades 4A, 3A, 2A, A and B hobs and 50 % for Grades C and D hobs.

A reference mandrel of nominal bore diameter shall pass through the bore as a check of alignment.

The tolerances on bore diameter are specified in Table 2.



Licensed Copy: athen reading, Reading University Library, 24/01/2010 04:30, Uncontrolled Copy, (c) BSI

Table 2 — Tolerance on bores

Grade of hob	Tolerance ^a									
	Datum diameter									
	mm									
	8	10	13	22	27	32	40	50	60	80
4A	H3									
3A	H3			H4						
2A										
A	H4			H5						
B	H5									
C	H6									
D										
^a In accordance with ISO 286-2.										

Table 3 — Ratio for test element and grade

Test number	Ratio of test element K_e	Ratio of grade						
		K_g						
		4A	3A	2A	A	B	C	D
1	0,3	0,35	0,5	0,71	1	1,6	1,6	2,11
2	0,25							
3	1,6							
4	1,25					1,8	1,8	2,38
5	1,4							
6	2,6							
7	No relationship to test 14							
8	0,5	1,25	2,31					
8A	0,85							
9	1,5	0,71	0,71	1	2	4	5,28	
9A	As by Table 4							
9B	0,8	0,35	0,5	0,71	1	2	4	5,28
10	0,4							
11	0,7							
11A	0,8							
12	1,3							
12A	1,8							
13	0,4							
14	1							
15	0,45							
16	0,8							

Table 4 — Ratio for division of module

Module range m	Ratio for module range K_m	Multiplication factor
$0,5 \leq m \leq 1$	0,33	1
$1 < m \leq 2$	0,33	
$2 < m \leq 3,5$	0,41	1,25
$3,5 < m \leq 6,0$	0,51	1,25
$6,0 < m \leq 10$	0,64	1,25
$10 < m \leq 16$	0,8	1,25
$16 < m \leq 25$	1	1,32
$25 < m \leq 40$	1,32	

Table 5 — Ratio for number of threads

Number of threads	Ratio for number of threads K_t	Multiplication factor
1	1	1,25
2	1,25	
3, 4	1,56	1,25
5, 6, 7	1,95	1,25

Table 6 — Accuracy requirements

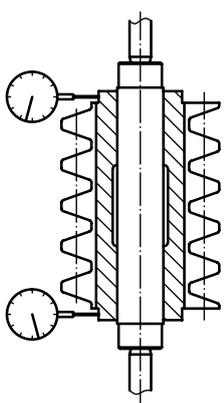
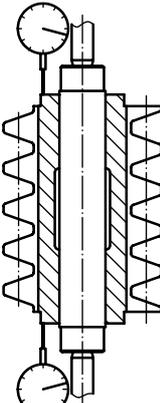
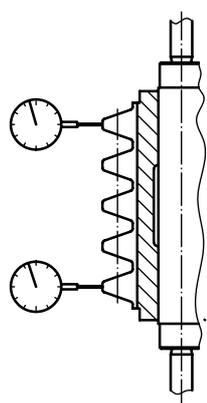
Test No.	Element	Drawing	Object of test	Pitch range module, m	Allowable deviation μm							
					4A	3A	2A	A	B	C	D	
1	Hub diameter		Radial runout	$0,5 \leq m \leq 1$	2	2	3	4	7	7	9	
				$1 < m \leq 2$	2	2	3	4	7	7	9	
				$2 < m \leq 3,5$	2	3	4	6	9	9	12	
				$3,5 < m \leq 6,0$	2	3	5	7	11	11	15	
				$6,0 < m \leq 10$	3	4	6	9	14	14	18	
				$10 < m \leq 16$	4	5	8	11	17	17	23	
2	Hub face		Axial runout	$0,5 \leq m \leq 1$	2	2	3	4	6	6	8	
				$1 < m \leq 2$	2	2	3	4	6	6	8	
				$2 < m \leq 3,5$	2	2	3	5	7	7	10	
				$3,5 < m \leq 6,0$	2	3	4	6	9	9	12	
				$6,0 < m \leq 10$	3	4	5	7	12	12	15	
				$10 < m \leq 16$	3	5	6	9	14	14	19	
3	Outside diameter		Radial runout of tips of teeth	$0,5 \leq m \leq 1$	8	12	17	24	43	86	113	
				$1 < m \leq 2$	8	12	17	24	43	86	113	
				$2 < m \leq 3,5$	10	15	21	30	53	106	140	
				$3,5 < m \leq 6,0$	13	18	26	37	66	132	174	
				$6,0 < m \leq 10$	16	23	33	46	83	166	219	
				$10 < m \leq 16$	20	29	41	58	104	207	274	
				$16 < m \leq 25$	25	36	51	72	130	259	342	
				$25 < m \leq 40$	33	48	67	95	171	342	451	

Table 6 — Accuracy requirements (continued)

Test No.	Element	Drawing	Object of test	Pitch range module, m mm	Allowable deviation μm							
					4A	3A	2A	A	B	C	D	
4	Cutting face of gashes		Straightness and radial alignment over cutting depth	$0,5 < m \leq 1$	6	9	13	19	33	44		
				$1 < m \leq 2$	6	9	13	19	33	44		
				$2 < m \leq 3,5$	8	12	16	23	42	55		
				$3,5 < m \leq 6,0$	10	14	20	29	52	68		
				$6,0 < m \leq 10$	13	18	26	36	65	86		
				$10 < m \leq 16$	16	23	32	45	81	107		
5	Cutting face of gashes		Adjacent spacing	$0,5 < m \leq 1$	7	10	15	21	37	49		
				$1 < m \leq 2$	7	10	15	21	37	49		
				$2 < m \leq 3,5$	9	13	18	26	46	61		
				$3,5 < m \leq 6,0$	11	16	23	32	58	76		
				$6,0 < m \leq 10$	14	20	29	40	73	96		
				$10 < m \leq 16$	18	25	36	50	91	120		
6	Cutting face of gashes		Total spacing	$0,5 < m \leq 1$	22	32	45	63	113	150		
				$1 < m \leq 2$	29	42	59	83	150	198		
				$2 < m \leq 3,5$	14	19	27	39	69	92		
				$3,5 < m \leq 6,0$	14	19	27	39	69	92		
				$6,0 < m \leq 10$	17	24	34	48	86	114		
				$10 < m \leq 16$	21	30	42	60	107	142		
				$10 < m \leq 16$	26	37	53	75	135	178		
				$16 < m \leq 25$	33	47	66	94	168	223		
				$16 < m \leq 25$	41	59	83	117	211	278		
				$25 < m \leq 40$	54	77	110	154	278	368		

Table 6 — Accuracy requirements (continued)

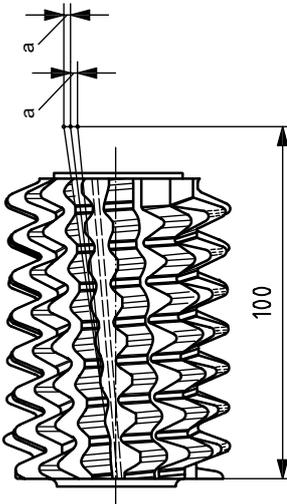
Test No.	Element	Drawing	Object of test	Pitch range module, m	Allowable deviation μm						
					Grade						
					4A	3A	2A	A	B	C	D
7	Cutting face of gashes	<p>(See the end of Table 6 for the key to the drawings.)</p> 	Gash lead deviation per 100 mm	$0,5 \leq m \leq 40$	28	40	57	80	100	144 $\langle \text{AC1} \rangle$	185

Table 6 — Accuracy requirements (continued)

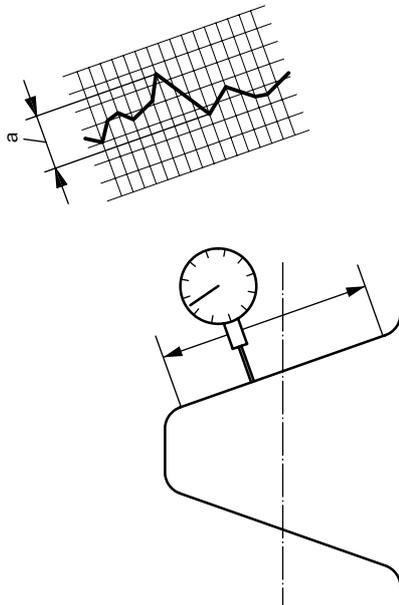
Test No.	Element	Drawing (See the end of Table 6 for the key to the drawings.)	Object of test	Pitch range module, m	Allowable deviation μm							
					Grade	4A	3A	2A	A	B	C	D
8	Tooth		Tooth profile 1-thread	$0,5 \leq m \leq 1$	3	4	5	7	15	30	39	
				$1 < m \leq 2$	3	4	5	7	15	30	39	
				$2 < m \leq 3,5$	3	5	7	9	18	37	49	
				$3,5 < m \leq 6,0$	4	6	8	11	23	46	61	
				$6,0 < m \leq 10$	5	7	10	14	29	58	76	
				$10 < m \leq 16$	6	9	13	18	36	72	95	
				$16 < m \leq 25$	8	11	16	23	45	90	119	
				$25 < m \leq 40$	10	15	21	30	59	119	157	
			2-threads	$0,5 \leq m \leq 1$	3	5	7	9	19	37	49	
				$1 < m \leq 2$	3	5	7	9	19	37	49	
				$2 < m \leq 3,5$	4	6	8	12	23	46	61	
				$3,5 < m \leq 6,0$	5	7	10	14	29	57	76	
				$6,0 < m \leq 10$	6	9	13	18	36	72	95	
				$10 < m \leq 16$	8	11	16	23	45	90	119	
				$16 < m \leq 25$	—	—	—	—	—	—	—	
				$25 < m \leq 40$	—	—	—	—	—	—	—	
3-, 4-threads	$0,5 \leq m \leq 1$	4	6	8	12	23	46	61				
	$1 < m \leq 2$	4	6	8	12	23	46	61				
	$2 < m \leq 3,5$	5	7	10	14	29	58	76				
	$3,5 < m \leq 6,0$	6	9	13	18	36	72	95				
	$6,0 < m \leq 10$	—	—	—	—	—	—	—				
	$10 < m \leq 16$	—	—	—	—	—	—	—				
	$16 < m \leq 25$	—	—	—	—	—	—	—				
	$25 < m \leq 40$	—	—	—	—	—	—	—				



Table 6 — Accuracy requirements (continued)

Test No.	Element	Drawing (See the end of Table 6 for the key to the drawings.)	Object of test	Pitch range module, m	Allowable deviation μm							
					Grade							
					4A	3A	2A	A	B	C	D	
8			5-, 6-, 7-threads	0,5 ≤ m ≤ 1	5	7	10	14	29	58	76	
				1 < m ≤ 2	5	7	10	14	29	58	76	
				2 < m ≤ 3,5	6	9	13	18	36	72	95	
				3,5 < m ≤ 6,0	—	—	—	—	—	—	—	
				6,0 < m ≤ 10	—	—	—	—	—	—	—	
				10 < m ≤ 16	—	—	—	—	—	—	—	
				16 < m ≤ 25	—	—	—	—	—	—	—	
				25 < m ≤ 40	—	—	—	—	—	—	—	

Table 6 — Accuracy requirements (continued)

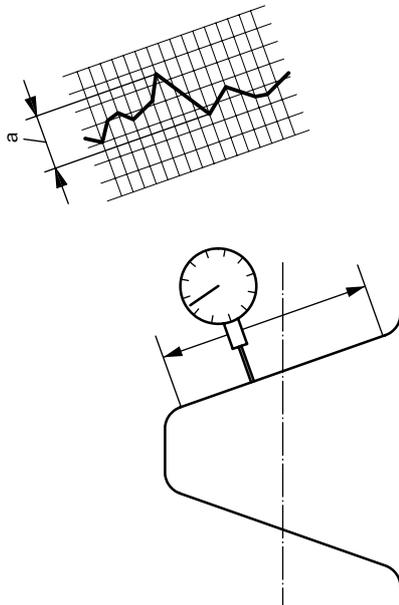
Test No.	Element	Drawing (See the end of Table 6 for the key to the drawings.)	Object of test	Pitch range module, m mm	Allowable deviation μm							
					4A	3A	2A	A	B	C	D	
8A	Tooth		Tooth profile (when line of action test is used)	$0,5 < m \leq 1$	4	6	9	13	25	50	67	
				$1 < m \leq 2$	4	6	9	13	25	50	67	
				$2 < m \leq 3,5$	5	8	11	16	31	63	83	
				$3,5 < m \leq 6,0$	7	10	14	20	39	78	103	
				$6,0 < m \leq 10$	9	12	17	24	49	98	129	
				$10 < m \leq 16$	11	15	22	31	61	112	162	
				$16 < m \leq 25$	13	19	27	38	77	153	202	
				$25 < m \leq 40$	18	25	36	50	101	202	267	
			1-thread	$0,5 \leq m \leq 1$	6	8	11	16	32	63	83	
				$1 < m \leq 2$	6	8	11	16	32	63	83	
				$2 < m \leq 3,5$	7	10	14	20	39	78	104	
				$3,5 < m \leq 6,0$	9	12	17	24	49	98	129	
				$6,0 < m \leq 10$	11	15	22	31	61	122	162	
				$10 < m \leq 16$	13	19	27	38	77	153	202	
				$16 < m \leq 25$	—	—	—	—	—	—	—	
				$25 < m \leq 40$	—	—	—	—	—	—	—	
2-threads	$0,5 \leq m \leq 1$	7	10	14	20	39	79	104				
	$1 < m \leq 2$	7	10	14	20	39	79	104				
	$2 < m \leq 3,5$	9	12	17	24	49	98	129				
	$3,5 < m \leq 6,0$	11	15	22	31	61	122	162				
	$6,0 < m \leq 10$	13	19	27	38	77	153	202				
	$10 < m \leq 16$	—	—	—	—	—	—	—				
	$16 < m \leq 25$	—	—	—	—	—	—	—				
	$25 < m \leq 40$	—	—	—	—	—	—	—				
3-, 4-threads	$0,5 \leq m \leq 1$	7	10	14	20	39	79	104				
	$1 < m \leq 2$	7	10	14	20	39	79	104				
	$2 < m \leq 3,5$	9	12	17	24	49	98	129				
	$3,5 < m \leq 6,0$	11	15	22	30	61	122	161				
	$6,0 < m \leq 10$	—	—	—	—	—	—	—				
	$10 < m \leq 16$	—	—	—	—	—	—	—				
	$16 < m \leq 25$	—	—	—	—	—	—	—				
	$25 < m \leq 40$	—	—	—	—	—	—	—				



Table 6 — Accuracy requirements (continued)

Test No.	Element	Drawing (See the end of Table 6 for the key to the drawings.)	Object of test	Pitch range module, m	Allowable deviation μm							
					Grade							
					4A	3A	2A	A	B	C	D	
8A			5-, 6-, 7-threads	0,5 ≤ m ≤ 1	9	12	17	25	49	98	130	
				1 < m ≤ 2	9	12	17	25	49	98	130	
				2 < m ≤ 3,5	11	15	22	31	61	122	161	
				3,5 < m ≤ 6,0	—	—	—	—	—	—	—	
				6,0 < m ≤ 10	—	—	—	—	—	—	—	
				10 < m ≤ 16	—	—	—	—	—	—	—	
				16 < m ≤ 25	—	—	—	—	—	—	—	
				25 < m ≤ 40	—	—	—	—	—	—	—	

Table 6 — Accuracy requirements (continued)



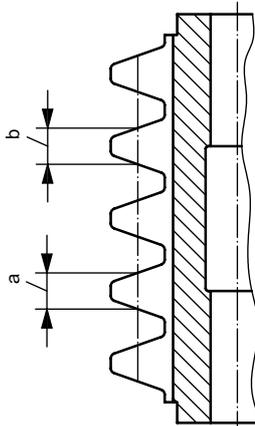

Test No.	Element	Drawing (See the end of Table 6 for the key to the drawings.)	Object of test	Pitch range module, m mm	Allowable deviation μm							
					Grade							
					4A	3A	2A	A	B	C	D	
9	Tooth		Normal tooth thickness (negative only)	$0,5 \leq m \leq 1$	16	16	22	22	45	45	57	
				$1 < m \leq 2$	16	16	22	22	45	45	57	
				$2 < m \leq 3,5$	20	20	28	28	55	55	70	
				$3,5 < m \leq 6,0$	24	24	34	34	69	69	87	
				$6,0 < m \leq 10$	31	31	43	43	86	86	110	
				$10 < m \leq 16$	38	38	54	54	108	108	137	
9A	Tooth		Addendum (positive only)	$0,5 \leq m \leq 1$	63	63	89	89	178	178	226	
				$1 < m \leq 2$	48	48	68	68	135	135	171	
				$2 < m \leq 3,5$	48	48	68	68	135	135	171	
				$3,5 < m \leq 6,0$	63	63	89	89	178	178	226	
				$6,0 < m \leq 10$	63	63	89	89	178	178	226	
				$10 < m \leq 16$	63	63	89	89	178	178	226	
				$16 < m \leq 25$	63	63	89	89	178	178	226	
				$25 < m \leq 40$	63	63	89	89	178	178	226	
					Deviations from test 9 divided by $2 \cdot \tan$ (pressure angle)							

Table 6 — Accuracy requirements (continued)

Test No.	Element	Drawing (See the end of Table 6 for the key to the drawings.)	Object of test	Pitch range module, m	Allowable deviation μm						
					Grade						
					4A	3A	2A	A	B	C	D
9B			Difference between maximum and minimum normal tooth thickness along one gash 1-thread	0,5 ≤ m ≤ 1	4	6	8				
				1 < m ≤ 2	4	6	8				
				2 < m ≤ 3,5	5	7	10				
				3,5 < m ≤ 6,0	6	9	13				
				6,0 < m ≤ 10	8	12	16				
				10 < m ≤ 16	10	14	20				
				16 < m ≤ 25	13	18	26				
				25 < m ≤ 40	17	24	34				
				0,5 ≤ m ≤ 1	5	7	11				
				1 < m ≤ 2	5	7	11				
	Tooth		2-threads 3-, 4-threads	2 < m ≤ 3,5	6	9	13				
				3,5 < m ≤ 6,0	8	11	16				
				6,0 < m ≤ 10	10	14	20				
				10 < m ≤ 16	13	18	26				
				16 < m ≤ 25	—	—	—				
				25 < m ≤ 40	—	—	—				
				0,5 ≤ m ≤ 1	6	9	13				
				1 < m ≤ 2	6	9	13				
				2 < m ≤ 3,5	8	12	16				
				3,5 < m ≤ 6,0	10	14	20				

Test 9B is only valid for quality grade 4A, 3A and 2A.

Table 6 — Accuracy requirements (continued)

Test No.	Element	Drawing (See the end of Table 6 for the key to the drawings.)	Object of test	Pitch range module, m mm	Allowable deviation μm							
					Grade							
					4A	3A	2A	A	B	C	D	
9B			5-, 6-, 7-threads	$0,5 \leq m \leq 1$	8	12	16	16				
				$1 < m \leq 2$	8	12	16	16				
				$2 < m \leq 3,5$	10	14	20	20				
				$3,5 < m \leq 6,0$	—	—	—	—				
				$6,0 < m \leq 10$	—	—	—	—				
				$10 < m \leq 16$	—	—	—	—				
				$16 < m \leq 25$	—	—	—	—				
				$25 < m \leq 40$	—	—	—	—				

Table 6 — Accuracy requirements (continued)

Test No.	Element	Drawing (See the end of Table 6 for the key to the drawings.)	Object of test	Pitch range module, m mm	Allowable deviation μm							
					4A	3A	2A	A	B	C	D	
10	Thread lead		Lead deviation on adjacent teeth	0,5 ≤ m ≤ 1	2	3	4	6	12	24	31	
				1 < m ≤ 2	2	3	4	6	12	24	31	
				2 < m ≤ 3,5	3	4	5	7	15	30	39	
				3,5 < m ≤ 6,0	3	5	7	9	18	37	48	
				6,0 < m ≤ 10	4	6	8	12	23	46	61	
				10 < m ≤ 16	5	7	10	14	29	58	76	
				16 < m ≤ 25	6	9	13	18	36	72	95	
				25 < m ≤ 40	8	12	17	24	48	95	125	
				0,5 ≤ m ≤ 1	3	4	5	7	15	30	39	
				1 < m ≤ 2	3	4	5	7	15	30	39	
				2 < m ≤ 3,5	3	5	7	9	18	37	49	
				3,5 < m ≤ 6,0	4	6	8	11	23	46	61	
				6,0 < m ≤ 10	5	7	10	14	29	58	76	
				10 < m ≤ 16	6	9	13	18	36	72	95	
				16 < m ≤ 25	—	—	—	—	—	—	—	
				25 < m ≤ 40	—	—	—	—	—	—	—	
3-, 4-threads				0,5 ≤ m ≤ 1	3	5	7	9	19	37	49	
				1 < m ≤ 2	3	5	7	9	19	37	49	
				2 < m ≤ 3,5	4	6	8	12	23	46	61	
				3,5 < m ≤ 6,0	5	7	10	14	29	57	76	
				6,0 < m ≤ 10	—	—	—	—	—	—	—	
				10 < m ≤ 16	—	—	—	—	—	—	—	
				16 < m ≤ 25	—	—	—	—	—	—	—	
				25 < m ≤ 40	—	—	—	—	—	—	—	

Table 6 — Accuracy requirements (continued)

Test No.	Element	Drawing (See the end of Table 6 for the key to the drawings.)	Object of test	Pitch range module, m mm	Allowable deviation μm						
					Grade						
					4A	3A	2A	A	B	C	D
10				$0,5 \leq m \leq 1$	4	6	8	12	23	46	61
				$1 < m \leq 2$	4	6	8	12	23	46	61
				$2 < m \leq 3,5$	5	7	10	14	29	58	76
				$3,5 < m \leq 6,0$	—	—	—	—	—	—	—
				$6,0 < m \leq 10$	—	—	—	—	—	—	—
				$10 < m \leq 16$	—	—	—	—	—	—	—
				$16 < m \leq 25$	—	—	—	—	—	—	—
				$25 < m \leq 40$	—	—	—	—	—	—	—

Table 6 — Accuracy requirements (continued)

Test No.	Element	Drawing (See the end of Table 6 for the key to the drawings.)	Object of test	Pitch range module, m	Allowable deviation μm							
					Grade	4A	3A	2A	A	B	C	D
11	Thread lead		Lead deviation in one axial pitch 1- to 7-threads	0,5 ≤ m ≤ 1	4	5	7	10	21	42	55	
				1 < m ≤ 2	4	5	7	10	21	42	55	
				2 < m ≤ 3,5	5	6	9	13	26	52	68	
				3,5 < m ≤ 6,0	6	8	11	16	32	64	85	
				6,0 < m ≤ 10	7	10	14	20	40	81	106	
				10 < m ≤ 16	9	13	18	25	50	101	133	
				16 < m ≤ 25	11	16	22	32	63	126	166	
				25 < m ≤ 40	15	21	30	42	83	166	220	

Table 6 — Accuracy requirements (continued)

Test No.	Element	Drawing (See the end of Table 6 for the key to the drawings.)	Object of test	Pitch range module, m	Allowable deviation μm							
					Grade	4A	3A	2A	A	B	C	D
11A	Thread lead		Lead deviation in one axial pitch (when line of action test is used) 1- to 7-threads	$0,5 \leq m \leq 1$	4	6	8	12	24	48	63	
				$1 < m \leq 2$	4	6	8	12	24	48	63	
				$2 < m \leq 3,5$	5	7	10	15	30	59	78	
				$3,5 < m \leq 6,0$	6	9	13	18	37	73	97	
				$6,0 < m \leq 10$	8	12	16	23	46	92	122	
				$10 < m \leq 16$	10	14	20	29	58	115	152	
				$16 < m \leq 25$	13	18	26	36	72	144	190	
				$25 < m \leq 40$	17	24	34	48	95	190	251	

Table 6 — Accuracy requirements (continued)

Test No.	Element	Drawing (See the end of Table 6 for the key to the drawings.)	Object of test	Pitch range module, m mm	Allowable deviation μm							
					Grade	4A	3A	2A	A	B	C	D
12	Thread lead		Lead deviation in three axial pitches 1- to 7-threads	$0,5 \leq m \leq 1$	7	10	14	19	39	77	102	
				$1 < m \leq 2$	7	10	14	19	39	77	102	
				$2 < m \leq 3,5$	8	12	17	24	48	96	127	
				$3,5 < m \leq 6,0$	10	15	21	30	60	119	158	
				$6,0 < m \leq 10$	13	19	27	37	75	150	198	
				$10 < m \leq 16$	16	23	33	47	94	187	247	
				$16 < m \leq 25$	20	29	42	59	117	234	309	
				$25 < m \leq 40$	27	39	55	77	154	309	408	

Table 6 — Accuracy requirements (continued)

Test No.	Element	Drawing (See the end of Table 6 for the key to the drawings.)	Object of test	Pitch range module, m	Allowable deviation μm						
					Grade	4A	3A	2A	A	B	C
13	Line of action		Adjacent deviation along line of action (measured at the cutting edge) 1-thread	$0,5 \leq m \leq 1$	2	3	4	6	12	24	31
				$1 < m \leq 2$	2	3	4	6	12	24	31
				$2 < m \leq 3,5$	3	4	5	7	15	30	39
				$3,5 < m \leq 6,0$	3	5	7	9	18	37	48
				$6,0 < m \leq 10$	4	6	8	12	23	46	61
				$10 < m \leq 16$	5	7	10	14	29	58	76
				$16 < m \leq 25$	6	9	13	18	36	72	95
				$25 < m \leq 40$	8	12	17	24	48	95	125
				$0,5 \leq m \leq 1$	3	4	5	7	15	30	39
				$1 < m \leq 2$	3	4	5	7	15	30	39
				$2 < m \leq 3,5$	3	5	7	9	18	37	49
				$3,5 < m \leq 6,0$	4	6	8	11	23	46	61
				$6,0 < m \leq 10$	5	7	10	14	29	58	76
$10 < m \leq 16$	6	9	13	18	36	72	95				
$16 < m \leq 25$	—	—	—	—	—	—	—				
$25 < m \leq 40$	—	—	—	—	—	—	—				
$0,5 \leq m \leq 1$	3	5	7	9	19	37	49				
$1 < m \leq 2$	3	5	7	9	19	37	49				
$2 < m \leq 3,5$	4	6	8	12	23	46	61				
$3,5 < m \leq 6,0$	5	7	10	14	29	57	76				
$6,0 < m \leq 10$	—	—	—	—	—	—	—				
$10 < m \leq 16$	—	—	—	—	—	—	—				
$16 < m \leq 25$	—	—	—	—	—	—	—				
$25 < m \leq 40$	—	—	—	—	—	—	—				

Table 6 — Accuracy requirements (continued)

Test No.	Element	Drawing (See the end of Table 6 for the key to the drawings.)	Object of test	Pitch range module, m	Allowable deviation μm						
					Grade						
				mm	4A	3A	2A	A	B	C	D
13			5-, 6-, 7-threads	$0,5 \leq m \leq 1$	4	6	8	12	23	46	61
				$1 < m \leq 2$	4	6	8	12	23	46	61
				$2 < m \leq 3,5$	5	7	10	14	29	58	76
				$3,5 < m \leq 6,0$	—	—	—	—	—	—	—
				$6,0 < m \leq 10$	—	—	—	—	—	—	—
				$10 < m \leq 16$	—	—	—	—	—	—	—
				$16 < m \leq 25$	—	—	—	—	—	—	—
$25 < m \leq 40$	—	—	—	—	—	—	—	—	—	—	

Table 6 — Accuracy requirements (continued)

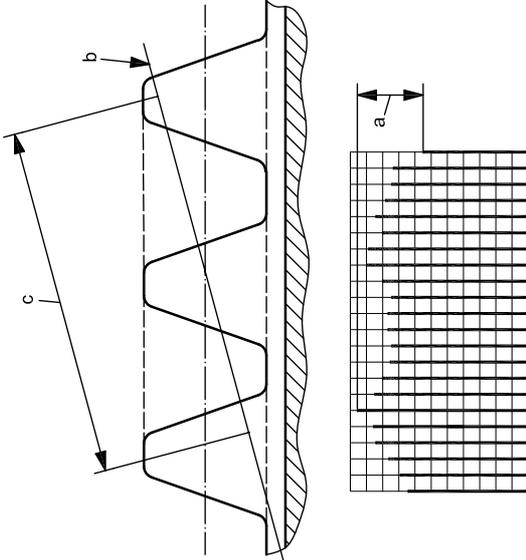
Test No.	Element	Drawing	Object of test	Pitch range module, m	Allowable deviation μm							
					Grade							
					4A	3A	2A	A	B	C	D	
14	Line of action	(See the end of Table 6 for the key to the drawings.) 	Total deviation along line of action (Measured at the cutting edge) 1-thread 2-threads 3-, 4-threads	0,5 ≤ m ≤ 1	5	7	11	15	30	59	78	
				1 < m ≤ 2	5	7	11	15	30	59	78	
				2 < m ≤ 3,5	6	9	13	18	37	74	97	
				3,5 < m ≤ 6,0	8	11	16	23	46	92	121	
				6,0 < m ≤ 10	10	14	20	29	58	115	152	
				10 < m ≤ 16	13	18	26	36	72	144	190	
				16 < m ≤ 25	16	23	32	45*	90	180	238	
				25 < m ≤ 40	21	30	42	59	119	238	314	
				0,5 ≤ m ≤ 1	6	9	13	19	37	74	98	
				1 < m ≤ 2	6	9	13	19	37	74	98	
				2 < m ≤ 3,5	8	12	16	23	46	92	122	
				3,5 < m ≤ 6,0	10	14	20	29	57	115	151	
				6,0 < m ≤ 10	13	18	26	36	72	144	190	
				10 < m ≤ 16	16	23	32	45	90	180	238	
16 < m ≤ 25	—	—	—	—	—	—	—	—				
25 < m ≤ 40	—	—	—	—	—	—	—	—				
0,5 ≤ m ≤ 1	8	12	16	23	46	93	122					
1 < m ≤ 2	8	12	16	23	46	93	122					
2 < m ≤ 3,5	10	14	20	29	58	115	152					
3,5 < m ≤ 6,0	13	18	25	36	72	143	189					
6,0 < m ≤ 10	—	—	—	—	—	—	—					
10 < m ≤ 16	—	—	—	—	—	—	—					
16 < m ≤ 25	—	—	—	—	—	—	—					
25 < m ≤ 40	—	—	—	—	—	—	—					

Table 6 — Accuracy requirements (continued)

Test No.	Element	Drawing (See the end of Table 6 for the key to the drawings.)	Object of test	Pitch range module, m mm	Allowable deviation μm						
					Grade						
					4A	3A	2A	A	B	C	D
14			5-, 6-, 7-threads	$0,5 \leq m \leq 1$	10	14	21	29	58	116	153
				$1 < m \leq 2$	10	14	21	29	58	116	153
				$2 < m \leq 3,5$	13	18	26	36	72	144	190
				$3,5 < m \leq 6,0$	—	—	—	—	—	—	
				$6,0 < m \leq 10$	—	—	—	—	—	—	
				$10 < m \leq 16$	—	—	—	—	—	—	
				$16 < m \leq 25$	—	—	—	—	—	—	
				$25 < m \leq 40$	—	—	—	—	—	—	

* Datum referred to in Clause 5.

Table 6 — Accuracy requirements (continued)

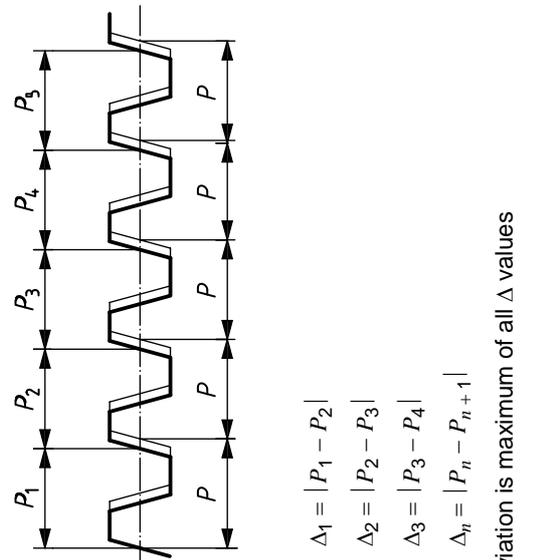
Test No.	Element	Drawing (See the end of Table 6 for the key to the drawings.)	Object of test	Pitch range module, m mm	Allowable deviation μm							
					Grade	4A	3A	2A	A	B	C	D
15	Thread spacing	 <p style="text-align: center;"> $\Delta_1 = P_1 - P_2$ $\Delta_2 = P_2 - P_3$ $\Delta_3 = P_3 - P_4$ $\Delta_n = P_n - P_{n+1}$ Deviation is maximum of all Δ values </p>	Axial pitch deviation from thread to thread	$0,5 \leq m \leq 1$	3	4	6	8	17	33	44	
			2-threads	$1 < m \leq 2$	3	4	6	8	17	33	44	
			3-, 4-threads	$2 < m \leq 3,5$	4	5	7	10	21	42	55	
				$3,5 < m \leq 6,0$	5	6	9	13	26	52	68	
				$6,0 < m \leq 10$	6	8	12	16	32	65	86	
				$10 < m \leq 16$	7	10	14	20	41	81	107	
				$16 < m \leq 25$	—	—	—	—	—	—	—	
				$25 < m \leq 40$	—	—	—	—	—	—	—	
			5-, 6-, 7-threads	$0,5 \leq m \leq 1$	4	5	7	10	21	42	55	
				$1 < m \leq 2$	4	5	7	10	21	42	55	
				$2 < m \leq 3,5$	5	6	9	13	26	52	68	
				$3,5 < m \leq 6,0$	6	8	11	16	32	64	85	
				$6,0 < m \leq 10$	—	—	—	—	—	—	—	
				$10 < m \leq 16$	—	—	—	—	—	—	—	
			5-, 6-, 7-threads	$16 < m \leq 25$	—	—	—	—	—	—	—	
$25 < m \leq 40$	—	—		—	—	—	—	—				
$0,5 \leq m \leq 1$	5	7		9	13	26	52	69				
$1 < m \leq 2$	5	7		9	13	26	52	69				
$2 < m \leq 3,5$	6	8		11	16	32	65	85				
$3,5 < m \leq 6,0$	—	—		—	—	—	—	—				

Table 6 — Accuracy requirements (continued)

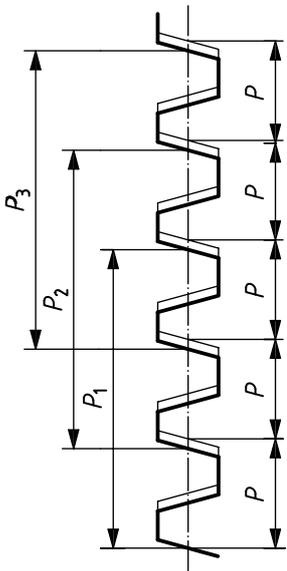
Test No.	Element	Drawing (See the end of Table 6 for the key to the drawings.)	Object of test	Pitch range module, <i>m</i> mm	Allowable deviation μm						
					Grade	4A	3A	2A	A	B	C
16	Thread spacing	 $\Delta_1 = P_1 - 3P $ $\Delta_2 = P_2 - 3P $ $\Delta_n = P_n - 3P $ <p>Deviation is maximum of all Δ values</p>	Axial pitch deviation in any three axial pitches over all threads	0,5 ≤ <i>m</i> ≤ 1	5	7	11	15	30	59	78
			1 < <i>m</i> ≤ 2	5	7	11	15	30	59	78	
			2 < <i>m</i> ≤ 3,5	6	9	13	18	37	74	97	
			3,5 < <i>m</i> ≤ 6,0	8	11	16	23	46	92	121	
			6,0 < <i>m</i> ≤ 10	10	14	20	29	58	115	152	
			10 < <i>m</i> ≤ 16	13	18	26	36	72	144	190	
			16 < <i>m</i> ≤ 25	—	—	—	—	—	—	—	
			25 < <i>m</i> ≤ 40	—	—	—	—	—	—	—	
			0,5 ≤ <i>m</i> ≤ 1	6	9	13	19	37	74	98	
			1 < <i>m</i> ≤ 2	6	9	13	19	37	74	98	
			2 < <i>m</i> ≤ 3,5	8	12	16	23	46	92	122	
			3,5 < <i>m</i> ≤ 6,0	10	14	20	29	57	115	151	
			6,0 < <i>m</i> ≤ 10	—	—	—	—	—	—	—	
			10 < <i>m</i> ≤ 16	—	—	—	—	—	—	—	
			16 < <i>m</i> ≤ 25	—	—	—	—	—	—	—	
			25 < <i>m</i> ≤ 40	—	—	—	—	—	—	—	
0,5 ≤ <i>m</i> ≤ 1	8	12	16	23	46	93	122				
1 < <i>m</i> ≤ 2	8	12	16	23	46	93	122				
2 < <i>m</i> ≤ 3,5	10	14	20	29	58	115	152				
3,5 < <i>m</i> ≤ 6,0	—	—	—	—	—	—	—				
6,0 < <i>m</i> ≤ 10	—	—	—	—	—	—	—				
10 < <i>m</i> ≤ 16	—	—	—	—	—	—	—				
16 < <i>m</i> ≤ 25	—	—	—	—	—	—	—				
25 < <i>m</i> ≤ 40	—	—	—	—	—	—	—				
5-, 6-, 7-threads	—	—	—	—	—	—	—				



Table 6 — Accuracy requirements (continued)

Test No.	a	Key			
		b	c	d	
4	deviation	—	—	—	
5	deviation	—	—	—	
6	deviation	—	—	—	
7	deviation	—	—	—	
8	deviation	—	—	—	
8A	deviation	—	—	—	
9	thickness	reference cylinder	—	—	
9A	addendum	reference cylinder	—	—	
9B	thickness max.	thickness min.	one gash	max. difference	
10	deviation	adjacent teeth	—	—	
11	deviation	one axial pitch	one tooth	—	
11A	deviation	one axial pitch	one tooth	—	
12	deviation	three axial pitches	one tooth	—	
12A	deviation	three axial pitches	one tooth	—	
13	deviation	line of action	—	—	
14	total deviation	line of action	active length	—	

Bibliography

- [1] ANSI/AGMA 1102-A03:2003, *Tolerance Specification for Gear Hobs*
- [2] BS 2062-1:1959, *Specification for gear hobs — Part 1: Hobs for general purposes, 1 d.p. to 20 d.p. inclusive*
- [3] JIS 4355:1998, *Gear hobs — Part 2: Accuracy requirements*
- [4] VDI/VDE 2606, *Measuring and testing of hobs*

Licensed Copy: athen reading, Reading University Library, 24/01/2010 04:30, Uncontrolled Copy, (c) BSI



BS ISO 4468:2009

ISO 4468:2009(E)

标准下载站
anystandards.com

Licensed Copy: athen reading, Reading University Library, 24/01/2010 04:30, Uncontrolled Copy, (c) BSI

ICS 21.200

Price based on 32 pages

© ISO 2009 – All rights reserved

Licensed Copy: athen reading, Reading University Library, 24/01/2010 04:30, Uncontrolled Copy, (c) BSI



BSI - British Standards Institution

BSI is the independent national body responsible for preparing British Standards. It presents the UK view on standards in Europe and at the international level. It is incorporated by Royal Charter.

Revisions

British Standards are updated by amendment or revision. Users of British Standards should make sure that they possess the latest amendments or editions.

It is the constant aim of BSI to improve the quality of our products and services. We would be grateful if anyone finding an inaccuracy or ambiguity while using this British Standard would inform the Secretary of the technical committee responsible, the identity of which can be found on the inside front cover. Tel: +44 (0)20 8996 9000. Fax: +44 (0)20 8996 7400.

BSI offers members an individual updating service called PLUS which ensures that subscribers automatically receive the latest editions of standards.

Buying standards

Orders for all BSI, international and foreign standards publications should be addressed to Customer Services. Tel: +44 (0)20 8996 9001. Fax: +44 (0)20 8996 7001 Email: orders@bsigroup.com You may also buy directly using a debit/credit card from the BSI Shop on the Website <http://www.bsigroup.com/shop>

In response to orders for international standards, it is BSI policy to supply the BSI implementation of those that have been published as British Standards, unless otherwise requested.

Information on standards

BSI provides a wide range of information on national, European and international standards through its Library and its Technical Help to Exporters Service. Various BSI electronic information services are also available which give details on all its products and services. Contact Information Centre. Tel: +44 (0)20 8996 7111 Fax: +44 (0)20 8996 7048 Email: info@bsigroup.com

Subscribing members of BSI are kept up to date with standards developments and receive substantial discounts on the purchase price of standards. For details of these and other benefits contact Membership Administration. Tel: +44 (0)20 8996 7002 Fax: +44 (0)20 8996 7001 Email: membership@bsigroup.com

Information regarding online access to British Standards via British Standards Online can be found at <http://www.bsigroup.com/BSOL>

Further information about BSI is available on the BSI website at <http://www.bsigroup.com>

Copyright

Copyright subsists in all BSI publications. BSI also holds the copyright, in the UK, of the publications of the international standardization bodies. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI.

This does not preclude the free use, in the course of implementing the standard, of necessary details such as symbols, and size, type or grade designations. If these details are to be used for any other purpose than implementation then the prior written permission of BSI must be obtained.

Details and advice can be obtained from the Copyright and Licensing Manager. Tel: +44 (0)20 8996 7070 Email: copyright@bsigroup.com