

# INTERNATIONAL STANDARD

**ISO**  
**1328-2**

First edition  
1997-08-01

---

## **Cylindrical gears — ISO system of accuracy —**

### **Part 2:**

**Definitions and allowable values of deviations  
relevant to radial composite deviations and  
runout information**

*Engrenages cylindriques — Système ISO de précision —*

*Partie 2: Définitions et valeurs admissibles des écarts composés radiaux et  
information sur le faux-rond*

This material is reproduced from ISO documents under International Organization for Standardization (ISO) Copyright License number IHS/ICC/1996. Not for resale. No part of these ISO documents may be reproduced in any form, electronic retrieval system or otherwise, except as allowed in the copyright law of the country of use, or with the prior written consent of ISO (Case postale 56, 1211 Geneva 20, Switzerland, Fax +41 22 734 10 79), IHS or the ISO Licensor's members.



Reference number  
ISO 1328-2:1997(E)

ISO 1328-2:1997(E)

IS

**Contents**

	Page
1 Scope .....	1
2 Normative references.....	1
3 Definitions.....	1
4 Symbols, quantities and units .....	2
5 Gear tooth accuracy terms relevant to radial composite deviations.....	2
6 Structure of the gear accuracy system.....	3
7 Formulae for grade 5 accuracy tolerances for radial composite deviations.....	4

**Annexes**

A Tables of allowable values of radial composite deviations.....	5
B Allowable values of runout with tolerance tables.....	8
C Bibliography.....	11

© ISO 1997

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Organization for Standardization  
 Case postale 56 • CH-1211 Genève 20 • Switzerland  
 Internet central@iso.ch  
 X.400 c=ch; a=400net; p=iso; o=isocs; s=central

Printed in Switzerland

IC  
 Dt  
 Pr

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

International Standard ISO 1328-2 was prepared by Technical Committee ISO/TC 60, *Gears*.

ISO 1328 consists of the following parts, under the general title *Cylindrical gears - ISO system of accuracy*:

- *Part 1: Definitions and allowable values of deviations relevant to corresponding flanks of gear teeth*
- *Part 2: Definitions and allowable values of deviations relevant to radial composite deviations and runout information*

Annexes A, B and C of this part of ISO 1328 are for information only.

## Introduction

Together with definitions and allowable values of gear element deviations, ISO 1328:1975 also provided advice on appropriate inspection methods.

In the course of revising ISO 1328:1975 and taking into account several important aspects, it was agreed that the description and advice on gear inspection methods would be published separately, and that, together with parts 1 and 2 of ISO 1328, a system of standards and technical reports (listed in clause 2 and annex C) should be established.

# Cylindrical gears — ISO system of accuracy —

## Part 2:

### Definitions and allowable values of deviations relevant to radial composite deviations and runout information

#### 1 Scope

This part of ISO 1328 establishes a system of accuracy relevant to radial composite deviations of individual cylindrical involute gears. It specifies the appropriate definitions of gear tooth accuracy terms, the structure of the gear accuracy system and the allowable values of the above mentioned deviations.

The radial measurement accuracy system has different grade ranges than elemental ranges in ISO 1328-1. The diameter and module ranges for radial composite deviations and runout are also different.

The radial composite accuracy system comprises 9 accuracy grades for  $F_i''$  or  $f_i''$  of which grade 4 is the highest and grade 12 is the lowest. The module range extends from 0,2 mm to 10 mm and the diameter range from 5,0 mm to 1 000 mm, see clauses 6 and 7. Annex A gives tables based on the formulae in clause 7.

Runout is defined in annex B and values are not given in the standard for determining accuracy grade 5. Annex B provides information on runout for use if agreed upon between purchaser and manufacturer.

#### 2 Normative references

The following standards contain provisions which, through reference in this text, constitute provisions, of this International Standard. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent editions of the standards indicated below. Members of IEC and ISO maintain registers of currently valid International Standards.

ISO 701:1976, *International gear notation — Symbols for geometrical data.*

ISO 1122-1:1983, *Glossary of gear terms — Part 1: Geometrical definitions.*

ISO 1328-1:1995, *Cylindrical gears — ISO System of accuracy — Part 1: Definitions and allowable values of deviations relevant to corresponding flanks of gear teeth.*

ISO/TR 10064-2:1996, *Cylindrical gears — Code of inspection practice — Part 2: Inspection related to radial composite deviations, runout, tooth thickness and backlash.*

#### 3 Definitions

For the purposes of this part of ISO 1328, the definitions given in ISO 1122-1 apply.

**4 Symbols, quantities and units**

Symbols are based on those given in ISO 701. Only symbols for quantities used in this part of ISO 1328 are given in table 1.

**Table 1 - Symbols used within ISO 1328-2**

Symbol	Quantity	Unit
$d$	reference diameter	mm
$m_n$	normal module	mm
$\epsilon_\beta$	overlap ratio	-
$f_i''$	tooth-to-tooth radial composite deviation	$\mu\text{m}$
$F_i''$	total radial composite deviation	$\mu\text{m}$
$L_{AE}$	active length	mm
$Q$	accuracy grade number	-
$z$	number of teeth	-
$F_r$	runout	$\mu\text{m}$

**5 Gear tooth accuracy terms relevant to radial composite deviations**

**5.1 Product gear**


The "product gear" is the gear which is being measured or evaluated.

**5.2 Radial composite deviations**

Measured values of radial composite deviations are affected by the accuracy of the master gear and the total contact ratio of the product gear with the master gear (refer to ISO/TR 10064-2).

**5.3 Total radial composite deviation,  $F_i''$**

Total radial composite deviation is the difference between the maximum and minimum values of centre distance which occur during a radial (double-flank) composite test, when the product gear with its right and left flank simultaneously in contact with those of the master gear, is turned through one complete revolution. Figure 1 shows an example of a relevant diagram.

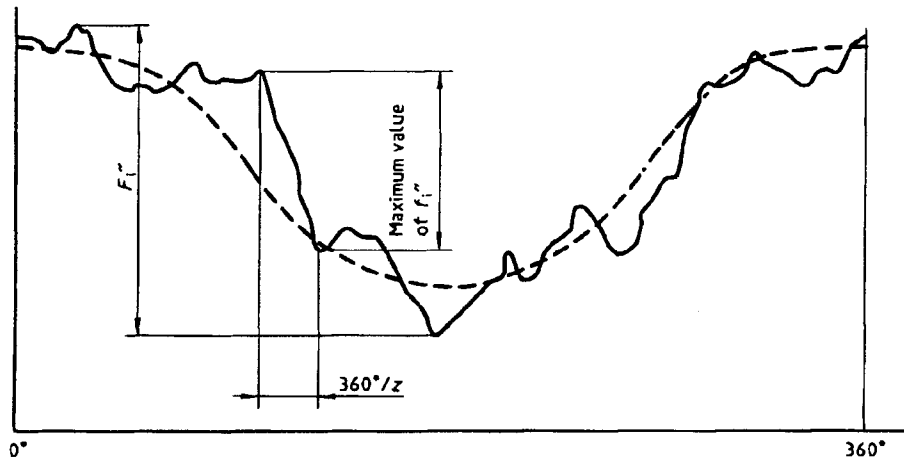

**Figure 1 - Radial composite deviation diagram**

#### 5.4 Tooth-to-tooth radial composite deviation, $f_r''$

Tooth-to-tooth radial composite deviation is the value of the radial composite deviation corresponding to one pitch,  $360^\circ/z$ , during the complete cycle of engagement of all the product gear teeth. The maximum value  $f_r''$  of all the product gear teeth should not exceed the specified allowable value (see figure 1).

#### 5.5 Master gear

The master gear for a radial composite test should engage the product gear over the "active length",  $L_{AE}$ , as defined in ISO 1328-1.

The tolerances have been established for spur gears and can be used to determine an accuracy grade. Since the overlap ratio,  $\epsilon_p$ , may influence the results of radial composite measurements of helical gears, the master gear used shall be subject to agreement between purchaser and manufacturer. When used for helical gears, the master gear facewidth should be such that  $\epsilon_p$  is less than or equal to 0,5 with the product gear.

### 6 Structure of the gear accuracy system

Determination of the accuracy grade by measurement of radial composite deviations in accordance with this part of ISO 1328 does not imply that the elemental deviations (e.g. pitch, profile, lead, etc. from ISO 1328-1) will conform to the same grade. Statements in documents concerning required accuracy shall include reference to the relevant standard, ISO 1328-1 or ISO 1328-2, as appropriate.

The tolerances for radial composite deviation apply only to the inspection of a gear running with a master gear. They do not apply to the measurement of two product gears running together.

#### 6.1 Gear accuracy

Gear accuracy is evaluated by comparing measured deviations against the numerical values determined according to clause 7. The values calculated using the formulae apply to accuracy grade 5. The step factor between two consecutive grades is equal to  $\sqrt{2}$ ; i.e., values of each next higher (lower) grade are determined by multiplying (dividing) by  $\sqrt{2}$ . The required value for any accuracy grade can be determined by multiplying the un-rounded calculated value for accuracy grade 5 by 2 to exponent  $[0,5 (Q - 5)]$ , where  $Q$  is the accuracy grade of the required value.

When gear geometry is not within the specified ranges of clause 1, use of the formulae shall be agreed upon between purchaser and manufacturer.

#### 6.2 Validity of radial composite deviation

When tolerance values are small, particularly when less than 5  $\mu\text{m}$ , the measuring apparatus including the master gear shall be of sufficiently high precision as to ensure that values can be measured and repeated with the required accuracy.

The tolerances have been established for spur gears and can be used to determine an accuracy grade. However, subject to agreement between purchaser and manufacturer they can similarly be used for helical gears. See also 5.5.

## 7 Formulae for grade 5 accuracy tolerances for radial composite deviations

Use the actual values of module and diameter in the following formulae.

- a) Total radial composite deviation,  $F_1''$

$$F_1'' = 3,2m_n + 1,01\sqrt{d} + 6,4$$

- b) Tooth-to-tooth radial composite deviation,  $f_1''$

$$f_1'' = 2,96m_n + 0,01\sqrt{d} + 0,8$$

The formulae with the system of accuracy presented in clause 6 are used if no other agreement is specified. The values for the tables in annex A were determined using the relevant mean values as stated in A.2. The tables of tolerances should only be used with agreement between purchaser and manufacturer.



## Annex A (informative) Tables of allowable values of radial composite deviations

### A.1 Purpose

This annex gives a method for applying the formulae of clause 7 and subclause 6.1 to develop tables of tolerances:

$$F_i'' = (F_r + f_i'')(2^{10,5(Q-5)}) = (3,2m_n + 1,01\sqrt{d} + 6,4)(2^{10,5(Q-5)})$$

### A.2 Ranges of parameters

The recommended lower and upper range limits for applying the formulae to tables are:

**a) for the reference diameter,  $d$**

composite: 5 / 20 / 50 / 125 / 280 / 560 / 1 000 mm

**b) for the normal module,  $m_n$**

composite: 0,2 / 0,5 / 0,8 / 1,0 / 1,5 / 2,5 / 4 / 6 / 10 mm

When applying the formulae of clause 7 for tables of tolerances, the parameters  $m_n$  and  $d$  can be introduced as the geometrical mean values of the relevant range limits. If the actual module is 7, for example, the range limits are normally  $m_n = 6$  and  $m_n = 10$  and the table value calculated with  $m_n = \sqrt{(6 \times 10)} = 7,746$ .

### A.3 Rounding rules

The tolerance values are rounded versions of values calculated using the formulae in clause 7 and subclause 6.1. If values are greater than 10  $\mu\text{m}$ , they are rounded to the nearest integer. If less than 10  $\mu\text{m}$ , they are rounded to the nearest 0,5  $\mu\text{m}$  value or integer.

### A.4 Validity

When procurement documents state the required gear accuracy grade with reference to ISO 1328-2, but without other indication, that accuracy grade applies only to deviations of all elements according to clauses 6 and 7. However, by agreement, different tolerance limits may be specified using tables for any quantity.

### A.5 Tables of radial deviation tolerances

The tabulated values in this annex are based on values calculated using the formulae in clause 7 with the criteria of A.2 and A.3. Total radial composite tolerance values are shown in table A.1 and tooth-to-tooth radial composite tolerance values in table A.2.

Table A.1 - Total radial composite tolerance,  $F_i''$

Reference diameter $d$ mm	Normal module $m_n$ mm	Accuracy grade								
		4	5	6	7	8	9	10	11	12
		$F_i''$ μm								
5 ≤ $d$ ≤ 20	0,2 ≤ $m_n$ ≤ 0,5	7,5	11	15	21	30	42	60	85	120
	0,5 < $m_n$ ≤ 0,8	8,0	12	16	23	33	46	66	93	131
	0,8 < $m_n$ ≤ 1,0	9,0	12	18	25	35	50	70	100	141
	1,0 < $m_n$ ≤ 1,5	10	14	19	27	38	54	76	108	153
	1,5 < $m_n$ ≤ 2,5	11	16	22	32	45	63	89	126	179
	2,5 < $m_n$ ≤ 4,0	14	20	28	39	56	79	112	158	223
20 < $d$ ≤ 50	0,2 ≤ $m_n$ ≤ 0,5	9,0	13	19	26	37	52	74	105	148
	0,5 < $m_n$ ≤ 0,8	10	14	20	28	40	56	80	113	160
	0,8 < $m_n$ ≤ 1,0	11	15	21	30	42	60	85	120	169
	1,0 < $m_n$ ≤ 1,5	11	16	23	32	45	64	91	128	181
	1,5 < $m_n$ ≤ 2,5	13	18	26	37	52	73	103	146	207
	2,5 < $m_n$ ≤ 4,0	16	22	31	44	63	89	126	178	251
	4,0 < $m_n$ ≤ 6,0	20	28	39	56	79	111	157	222	314
6,0 < $m_n$ ≤ 10	26	37	52	74	104	147	209	295	417	
50 < $d$ ≤ 125	0,2 ≤ $m_n$ ≤ 0,5	12	16	23	33	46	66	93	131	185
	0,5 < $m_n$ ≤ 0,8	12	17	25	35	49	70	98	139	197
	0,8 < $m_n$ ≤ 1,0	13	18	26	36	52	73	103	146	206
	1,0 < $m_n$ ≤ 1,5	14	19	27	39	55	77	109	154	218
	1,5 < $m_n$ ≤ 2,5	15	22	31	43	61	86	122	173	244
	2,5 < $m_n$ ≤ 4,0	18	25	36	51	72	102	144	204	288
	4,0 < $m_n$ ≤ 6,0	22	31	44	62	88	124	176	248	351
	6,0 < $m_n$ ≤ 10	28	40	57	80	114	161	227	321	454
125 < $d$ ≤ 280	0,2 ≤ $m_n$ ≤ 0,5	15	21	30	42	60	85	120	170	240
	0,5 < $m_n$ ≤ 0,8	16	22	31	44	63	89	126	178	252
	0,8 < $m_n$ ≤ 1,0	16	23	33	46	65	92	131	185	261
	1,0 < $m_n$ ≤ 1,5	17	24	34	48	68	97	137	193	273
	1,5 < $m_n$ ≤ 2,5	19	26	37	53	75	106	149	211	299
	2,5 < $m_n$ ≤ 4,0	21	30	43	61	86	121	172	243	343
	4,0 < $m_n$ ≤ 6,0	25	36	51	72	102	144	203	287	406
	6,0 < $m_n$ ≤ 10	32	45	64	90	127	180	255	360	509
280 < $d$ ≤ 560	0,2 ≤ $m_n$ ≤ 0,5	19	28	39	55	78	110	156	220	311
	0,5 < $m_n$ ≤ 0,8	20	29	40	57	81	114	161	228	323
	0,8 < $m_n$ ≤ 1,0	21	29	42	59	83	117	166	235	332
	1,0 < $m_n$ ≤ 1,5	22	30	43	61	86	122	172	243	344
	1,5 < $m_n$ ≤ 2,5	23	33	46	65	92	131	185	262	370
	2,5 < $m_n$ ≤ 4,0	26	37	52	73	104	146	207	293	414
	4,0 < $m_n$ ≤ 6,0	30	42	60	84	119	169	239	337	477
	6,0 < $m_n$ ≤ 10	36	51	73	103	145	205	290	410	580
560 < $d$ ≤ 1 000	0,2 ≤ $m_n$ ≤ 0,5	25	35	50	70	99	140	198	280	396
	0,5 < $m_n$ ≤ 0,8	25	36	51	72	102	144	204	288	408
	0,8 < $m_n$ ≤ 1,0	26	37	52	74	104	148	209	295	417
	1,0 < $m_n$ ≤ 1,5	27	38	54	76	107	152	215	304	429
	1,5 < $m_n$ ≤ 2,5	28	40	57	80	114	161	228	322	455
	2,5 < $m_n$ ≤ 4,0	31	44	62	88	125	177	250	353	499
	4,0 < $m_n$ ≤ 6,0	35	50	70	99	141	199	281	398	562
	6,0 < $m_n$ ≤ 10	42	59	83	118	166	235	333	471	665

Table A.2 - Tooth-to-tooth radial composite tolerance,  $f_r''$

Reference diameter $d$ mm	Normal module $m_n$ mm	Accuracy grade								
		4	5	6	7	8	9	10	11	12
		$F_r''$ $\mu\text{m}$								
$5 \leq d \leq 20$	$0,2 \leq m_n \leq 0,5$	1,0	2,0	2,5	3,5	5,0	7,0	10	14	20
	$0,5 < m_n \leq 0,8$	2,0	2,5	4,0	5,5	7,5	11	15	22	31
	$0,8 < m_n \leq 1,0$	2,5	3,5	5,0	7,0	10	14	20	28	39
	$1,0 < m_n \leq 1,5$	3,0	4,5	6,5	9,0	13	18	25	36	50
	$1,5 < m_n \leq 2,5$	4,5	6,5	9,5	13	19	26	37	53	74
	$2,5 < m_n \leq 4,0$	7,0	10	14	20	29	41	58	82	115
$20 < d \leq 50$	$0,2 \leq m_n \leq 0,5$	1,5	2,0	2,5	3,5	5,0	7,0	10	14	20
	$0,5 < m_n \leq 0,8$	2,0	2,5	4,0	5,5	7,5	11	15	22	31
	$0,8 < m_n \leq 1,0$	2,5	3,5	5,0	7,0	10	14	20	28	40
	$1,0 < m_n \leq 1,5$	3,0	4,5	6,5	9,0	13	18	25	36	51
	$1,5 < m_n \leq 2,5$	4,5	6,5	9,5	13	19	26	37	53	75
	$2,5 < m_n \leq 4,0$	7,0	10	14	20	29	41	58	82	116
	$4,0 < m_n \leq 6,0$	11	15	22	31	43	61	87	123	174
$6,0 < m_n \leq 10$	17	24	34	48	67	95	135	190	269	
$50 < d \leq 125$	$0,2 \leq m_n \leq 0,5$	1,5	2,0	2,5	3,5	5,0	7,5	10	15	21
	$0,5 < m_n \leq 0,8$	2,0	3,0	4,0	5,5	8,0	11	16	22	31
	$0,8 < m_n \leq 1,0$	2,5	3,5	5,0	7,0	10	14	20	28	40
	$1,0 < m_n \leq 1,5$	3,0	4,5	6,5	9,0	13	18	26	36	51
	$1,5 < m_n \leq 2,5$	4,5	6,5	9,5	13	19	26	37	53	75
	$2,5 < m_n \leq 4,0$	7,0	10	14	20	29	41	58	82	116
	$4,0 < m_n \leq 6,0$	11	15	22	31	44	62	87	123	174
	$6,0 < m_n \leq 10$	17	24	34	48	67	95	135	191	269
$125 < d \leq 280$	$0,2 \leq m_n \leq 0,5$	1,5	2,0	2,5	3,5	5,5	7,5	11	15	21
	$0,5 < m_n \leq 0,8$	2,0	3,0	4,0	5,5	8,0	11	16	22	32
	$0,8 < m_n \leq 1,0$	2,5	3,5	5,0	7,0	10	14	20	29	41
	$1,0 < m_n \leq 1,5$	3,0	4,5	6,5	9,0	13	18	26	36	52
	$1,5 < m_n \leq 2,5$	4,5	6,5	9,5	13	19	27	38	53	75
	$2,5 < m_n \leq 4,0$	7,5	10	15	21	29	41	58	82	116
	$4,0 < m_n \leq 6,0$	11	15	22	31	44	62	87	124	175
	$6,0 < m_n \leq 10$	17	24	34	48	67	95	135	191	270
$280 < d \leq 560$	$0,2 \leq m_n \leq 0,5$	1,5	2,0	2,5	4,0	5,5	7,5	11	15	22
	$0,5 < m_n \leq 0,8$	2,0	3,0	4,0	5,5	8,0	11	16	23	32
	$0,8 < m_n \leq 1,0$	2,5	3,5	5,0	7,5	10	15	21	29	41
	$1,0 < m_n \leq 1,5$	3,5	4,5	6,5	9,0	13	18	26	37	52
	$1,5 < m_n \leq 2,5$	5,0	6,5	9,5	13	19	27	38	54	76
	$2,5 < m_n \leq 4,0$	7,5	10	15	21	29	41	59	83	117
	$4,0 < m_n \leq 6,0$	11	15	22	31	44	62	88	124	175
	$6,0 < m_n \leq 10$	17	24	34	48	68	96	135	191	271
$560 < d \leq 1\ 000$	$0,2 \leq m_n \leq 0,5$	1,5	2,0	3,0	4,0	5,5	8,0	11	16	23
	$0,5 < m_n \leq 0,8$	2,0	3,0	4,0	6,0	8,5	12	17	24	33
	$0,8 < m_n \leq 1,0$	2,5	3,5	5,5	7,5	11	15	21	30	42
	$1,0 < m_n \leq 1,5$	3,5	4,5	6,5	9,5	13	19	27	38	53
	$1,5 < m_n \leq 2,5$	5,0	7,0	9,5	14	19	27	38	54	77
	$2,5 < m_n \leq 4,0$	7,5	10	15	21	30	42	59	83	118
	$4,0 < m_n \leq 6,0$	11	16	22	31	44	62	88	125	176
	$6,0 < m_n \leq 10$	17	24	34	48	68	96	136	192	272


**Annex B**  
(informative)  
**Allowable values of runout with tolerance tables**

**B.1 Purpose**

This annex gives informative values and a method for applying the runout formula to develop tables of recommended limits.

**B.2 Runout,  $F_r$**

The value of the runout,  $F_r$ , of the gear is the difference between the maximum and the minimum radial distance from the gear axis, of a probe (ball, cylinder, anvil) which is placed successively in each tooth space. During each check, the probe contacts both the right and left flanks at approximately mid tooth-depth. Figure B.1 shows an example of a runout diagram, in which the eccentricity is a portion of the runout (see ISO/TR 10064-2).

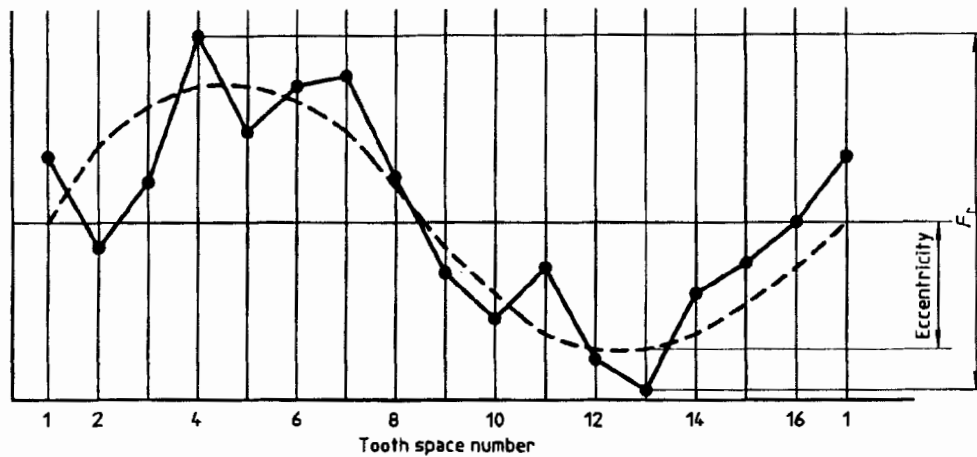

**Figure B.1 - Runout diagram of a gear with 16 teeth**

**B.3 Recommended formula for runout tolerances,  $F_r$ , for accuracy grade 5**

Use the actual values of module and diameter in the following formula.

$$F_r = 0,8 F_p = 0,24 m_n + 1,0\sqrt{d} + 5,6$$

The system of accuracy is the same as that for radial composite deviations. See 6.1.

**B.4 Ranges of parameters**

The recommended lower and upper range limits for applying the formula are:

a) For the reference diameter,  $d$

5 / 20 / 50 / 125 / 280 / 560 / 1000 / 1600 / 2500 / 4000 / 6000 / 8000 / 10 000 mm

b) For the normal module,  $m_n$

0,5 / 2,0 / 3,5 / 6 / 10 / 16 / 25 / 40 / 70 mm

When applying the formula of B.3 for a table of tolerances, the parameters  $m_n$  and  $d$  can be introduced as the geometrical mean values of the relevant range limits. If the actual module is 7, for example, the range limits are normally  $m_n = 6$  and  $m_n = 10$  and the table value calculated with  $m_n = \sqrt{(6 \times 10)} = 7,746$ .

If gear accuracy is to be evaluated using tables of tolerances, there must be an agreement between the purchaser and the supplier.

**B.5 Rounding rules**

The tolerance values are rounded versions of values calculated using the formula. If values are greater than 10 µm, they are rounded to the nearest integer. If less than 10 µm, they are rounded to the nearest 0,5 µm value or integer.

**B.6 Validity**

When procurement documents state the required gear accuracy grade with reference to ISO 1328-2, but without other indication, that accuracy grade applies only to deviations of all elements according to clause 6. However, by agreement, runout tolerance limits may be specified between purchaser and manufacturer.

When tolerance values are small, particularly when less than 5 µm, the measuring apparatus must be of sufficiently high precision to ensure that values can be measured and repeated with the required accuracy.

**B.7 Table of runout tolerances**

The tabulated values in this annex are based on values calculated using the formula, with the criteria of B.3, B.4 and B.5. Runout tolerance values are shown in table B.1.

**Table B.1 - Runout tolerance,  $F_v$**

Reference diameter $d$ mm	Normal module $m_n$ mm	Accuracy grade												
		0	1	2	3	4	5	6	7	8	9	10	11	12
		$F_v$ , µm												
$5 \leq d \leq 20$	$0,5 \leq m_n \leq 2,0$	1,5	2,5	3,0	4,5	6,5	9,0	13	18	25	36	51	72	102
	$2,0 < m_n \leq 3,5$	1,5	2,5	3,5	4,5	6,5	9,5	13	19	27	38	53	75	106
$20 < d \leq 50$	$0,5 \leq m_n \leq 2,0$	2,0	3,0	4,0	5,5	8,0	11	16	23	32	46	65	92	130
	$2,0 < m_n \leq 3,5$	2,0	3,0	4,0	6,0	8,5	12	17	24	34	47	67	95	134
	$3,5 < m_n \leq 6,0$	2,0	3,0	4,5	6,0	8,5	12	17	25	35	49	70	99	139
	$6,0 < m_n \leq 10$	2,5	3,5	4,5	6,5	9,5	13	19	26	37	52	74	105	148
$50 < d \leq 125$	$0,5 \leq m_n \leq 2,0$	2,5	3,5	5,0	7,5	10	15	21	29	42	59	83	118	167
	$2,0 < m_n \leq 3,5$	2,5	4,0	5,5	7,5	11	15	21	30	43	61	86	121	171
	$3,5 < m_n \leq 6,0$	3,0	4,0	5,5	8,0	11	16	22	31	44	62	88	125	176
	$6,0 < m_n \leq 10$	3,0	4,0	6,0	8,0	12	16	23	33	46	65	92	131	185
	$10 < m_n \leq 16$	3,0	4,5	6,0	9,0	12	18	25	35	50	70	99	140	198
	$16 < m_n \leq 25$	3,5	5,0	7,0	9,5	14	19	27	39	55	77	109	154	218
$125 < d \leq 280$	$0,5 \leq m_n \leq 2,0$	3,5	5,0	7,0	10	14	20	28	39	55	78	110	156	221
	$2,0 < m_n \leq 3,5$	3,5	5,0	7,0	10	14	20	28	40	56	80	113	159	225
	$3,5 < m_n \leq 6,0$	3,5	5,0	7,0	10	14	20	29	41	58	82	115	163	231
	$6,0 < m_n \leq 10$	3,5	5,5	7,5	11	15	21	30	42	60	85	120	169	239
	$10 < m_n \leq 16$	4,0	5,5	8,0	11	16	22	32	45	63	89	126	179	252
	$16 < m_n \leq 25$	4,5	6,0	8,5	12	17	24	34	48	68	96	136	193	272
	$25 < m_n \leq 40$	4,5	6,5	9,5	13	19	27	38	54	76	107	152	215	304
	$40 < m_n \leq 60$	5,0	7,0	10	14	20	28	39	55	78	110	156	221	310
$280 < d \leq 560$	$0,5 \leq m_n \leq 2,0$	4,5	6,5	9,0	13	18	26	36	51	73	103	146	206	291
	$2,0 < m_n \leq 3,5$	4,5	6,5	9,0	13	18	26	37	52	74	105	148	209	296
	$3,5 < m_n \leq 6,0$	4,5	6,5	9,5	13	19	27	38	53	75	106	150	213	301
	$6,0 < m_n \leq 10$	5,0	7,0	9,5	14	19	27	39	55	77	109	155	219	310

(continued)

Table B.1 - (concluded)

Reference diameter <i>d</i> mm	Normal module <i>m<sub>n</sub></i> mm	Accuracy grade												
		0	1	2	3	4	5	6	7	8	9	10	11	12
		<i>F<sub>t</sub></i> μm												
280 < <i>d</i> ≤ 560	10 < <i>m<sub>n</sub></i> ≤ 16	5,0	7,0	10	14	20	29	40	57	81	114	161	228	323
	16 < <i>m<sub>n</sub></i> ≤ 25	5,5	7,5	11	15	21	30	43	61	86	121	171	242	343
	25 < <i>m<sub>n</sub></i> ≤ 40	6,0	8,5	12	17	23	33	47	66	94	132	187	265	374
	40 < <i>m<sub>n</sub></i> ≤ 70	7,0	9,5	14	19	27	38	54	76	108	153	216	306	432
560 < <i>d</i> ≤ 1 000	0,5 ≤ <i>m<sub>n</sub></i> ≤ 2,0	6,0	8,5	12	17	23	33	47	66	94	133	188	266	376
	2,0 < <i>m<sub>n</sub></i> ≤ 3,5	6,0	8,5	12	17	24	34	48	67	95	134	190	269	380
	3,5 < <i>m<sub>n</sub></i> ≤ 6,0	6,0	8,5	12	17	24	34	48	68	96	136	193	272	385
	6,0 < <i>m<sub>n</sub></i> ≤ 10	6,0	8,5	12	17	25	35	49	70	98	139	197	279	394
	10 < <i>m<sub>n</sub></i> ≤ 16	6,5	9,0	13	18	25	36	51	72	102	144	204	288	407
	16 < <i>m<sub>n</sub></i> ≤ 25	6,5	9,5	13	19	27	38	53	76	107	151	214	302	427
	25 < <i>m<sub>n</sub></i> ≤ 40	7,0	10	14	20	29	41	57	81	115	162	229	324	459
	40 < <i>m<sub>n</sub></i> ≤ 70	8,0	11	16	23	32	46	65	91	129	183	258	365	517
1 000 < <i>d</i> ≤ 1 600	2,0 ≤ <i>m<sub>n</sub></i> ≤ 3,5	7,5	10	15	21	30	42	59	84	118	167	236	334	473
	3,5 < <i>m<sub>n</sub></i> ≤ 6,0	7,5	11	15	21	30	42	60	85	120	169	239	338	478
	6,0 < <i>m<sub>n</sub></i> ≤ 10	7,5	11	15	22	30	43	61	86	122	172	243	344	487
	10 < <i>m<sub>n</sub></i> ≤ 16	8,0	11	16	22	31	44	63	88	125	177	250	354	500
	16 < <i>m<sub>n</sub></i> ≤ 25	8,0	11	16	23	33	46	65	92	130	184	260	368	520
	25 < <i>m<sub>n</sub></i> ≤ 40	8,5	12	17	24	34	49	69	98	138	195	276	390	552
1 600 < <i>d</i> ≤ 2 500	40 < <i>m<sub>n</sub></i> ≤ 70	9,5	13	19	27	38	54	76	108	152	215	305	431	609
	3,5 ≤ <i>m<sub>n</sub></i> ≤ 6,0	9,0	13	18	26	36	51	73	103	145	206	291	411	582
	6,0 < <i>m<sub>n</sub></i> ≤ 10	9,0	13	18	26	37	52	74	104	148	209	295	417	590
	10 < <i>m<sub>n</sub></i> ≤ 16	9,5	13	19	27	38	53	75	107	151	213	302	427	604
	16 < <i>m<sub>n</sub></i> ≤ 25	9,5	14	19	28	39	55	78	110	156	220	312	441	624
2 500 < <i>d</i> ≤ 4 000	25 < <i>m<sub>n</sub></i> ≤ 40	10	14	20	29	41	58	82	116	164	232	328	463	655
	40 < <i>m<sub>n</sub></i> ≤ 70	11	16	22	32	45	63	89	126	178	252	357	504	713
	6,0 ≤ <i>m<sub>n</sub></i> ≤ 10	11	16	23	32	45	64	90	127	180	255	360	510	721
	10 < <i>m<sub>n</sub></i> ≤ 16	11	16	23	32	46	65	92	130	183	259	367	519	734
	16 < <i>m<sub>n</sub></i> ≤ 25	12	17	24	33	47	67	94	133	188	267	377	533	754
4 000 < <i>d</i> ≤ 6 000	25 < <i>m<sub>n</sub></i> ≤ 40	12	17	25	35	49	69	98	139	196	278	393	555	785
	40 < <i>m<sub>n</sub></i> ≤ 70	13	19	26	37	53	75	105	149	211	298	422	596	843
	6,0 ≤ <i>m<sub>n</sub></i> ≤ 10	14	19	27	39	55	77	110	155	219	310	438	620	876
	10 < <i>m<sub>n</sub></i> ≤ 16	14	20	28	39	56	79	111	157	222	315	445	629	890
	16 < <i>m<sub>n</sub></i> ≤ 25	14	20	28	40	57	80	114	161	227	322	455	643	910
6 000 < <i>d</i> ≤ 8 000	25 < <i>m<sub>n</sub></i> ≤ 40	15	21	29	42	59	83	118	166	235	333	471	665	941
	40 < <i>m<sub>n</sub></i> ≤ 70	16	22	31	44	62	88	125	177	250	353	499	706	999
	6,0 ≤ <i>m<sub>n</sub></i> ≤ 10	16	23	32	45	64	91	128	181	257	363	513	726	1026
	10 < <i>m<sub>n</sub></i> ≤ 16	16	23	32	46	65	92	130	184	260	367	520	735	1039
	16 < <i>m<sub>n</sub></i> ≤ 25	17	23	33	47	66	94	132	187	265	375	530	749	1059
8 000 < <i>d</i> ≤ 10 000	25 < <i>m<sub>n</sub></i> ≤ 40	17	24	34	48	68	96	136	193	273	386	545	771	1091
	40 < <i>m<sub>n</sub></i> ≤ 70	18	25	36	51	72	102	144	203	287	406	574	812	1149
	6,0 ≤ <i>m<sub>n</sub></i> ≤ 10	18	26	36	51	72	102	144	204	289	408	577	816	1154
	10 < <i>m<sub>n</sub></i> ≤ 16	18	26	36	52	73	103	146	206	292	413	584	826	1168
	16 < <i>m<sub>n</sub></i> ≤ 25	19	26	37	52	74	105	148	210	297	420	594	840	1188
8 000 < <i>d</i> ≤ 10 000	25 < <i>m<sub>n</sub></i> ≤ 40	19	27	38	54	76	108	152	216	305	431	610	862	1219
	40 < <i>m<sub>n</sub></i> ≤ 70	20	28	40	56	80	113	160	226	319	451	639	903	1277

**Annex C**  
**(informative)**  
**Bibliography**

- [1] ISO 53:—<sup>1)</sup>, *Cylindrical gears for general and heavy engineering — Standard basic rack tooth profile.*
- [2] ISO 54:1996, *Cylindrical gears for general engineering and for heavy engineering — Modules.*
- [3] ISO/TR 10064-1:1992, *Cylindrical gears — Code of inspection practice — Part 1: Inspection of corresponding flanks of gear teeth.*
- [4] ISO/TR 10064-3:1996, *Cylindrical gears — Code of inspection practice — Part 3: Recommendations relative to gear blanks, shaft centre distance and parallelism of axes.*
- [5] ISO/TR 10064-4:—<sup>2)</sup>, *Cylindrical gears — Code of inspection practice — Part 4: Recommendations relative to surface roughness and tooth contact pattern checking.*

---

1) To be published. (Revision of ISO 53:1974)

2) To be published.