

Spring-type straight pins — Slotted, light duty (ISO 13337:2009)

ICS 21.060.50

National foreword

This British Standard is the UK implementation of EN ISO 13337:2009. It is identical to ISO 13337:2009. It supersedes BS EN ISO 13337:1998 which is withdrawn.

The UK participation in its preparation was entrusted to Technical Committee FME/9/3, Product standards for fasteners.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 31 July 2009

© BSI 2009

ISBN 978 0 580 63527 4

Amendments/corrigenda issued since publication

Date	Comments

EUROPEAN STANDARD

EN ISO 13337

NORME EUROPÉENNE

EUROPÄISCHE NORM

June 2009

ICS 21.060.50

Supersedes EN ISO 13337:1997

English Version

Spring-type straight pins - Slotted, light duty (ISO 13337:2009)

Goupilles cylindriques creuses, dites goupilles élastiques -
Série mince (ISO 13337:2009)

Spannstifte (-hülsen) - Geschlitzt, leichte Ausführung (ISO
13337:2009)

This European Standard was approved by CEN on 6 June 2009.

CEN members are bound to comply with the CEN/GENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: Avenue Marnix 17, B-1000 Brussels

Foreword

This document (EN ISO 13337:2009) has been prepared by Technical Committee ISO/TC 2 "Fasteners" in collaboration with Technical Committee CEN/TC 185 "Fasteners" the secretariat of which is held by DIN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by December 2009, and conflicting national standards shall be withdrawn at the latest by December 2009.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

This document supersedes EN ISO 13337:1997.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and the United Kingdom.

Endorsement notice

The text of ISO 13337:2009 has been approved by CEN as a EN ISO 13337:2009 without any modification.

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 13337 was prepared by Technical Committee ISO/TC 2, *Fasteners*, Subcommittee SC 10, *Product standards for fasteners*.

This second edition cancels and replaces the first edition (ISO 13337:1997), which has been technically revised.

Spring-type straight pins — Slotted, light duty

1 Scope

This International Standard specifies the characteristics of slotted spring-type straight pins, made of steel or of austenitic or martensitic stainless steel, light duty, with nominal diameter, d_1 , from 2 mm to 50 mm inclusive.

NOTE The nominal diameters have been chosen in such a way that pins can be fitted one into the other or combined with pins, heavy duty, in accordance with ISO 8752.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 3269, *Fasteners — Acceptance inspection*


ISO 4042, *Fasteners — Electroplated coatings*

ISO 6507-1, *Metallic materials — Vickers hardness test — Part 1: Test method*

ISO 8749, *Pins and grooved pins — Shear test*

3 Dimensions

See Figure 1 and Table 1.

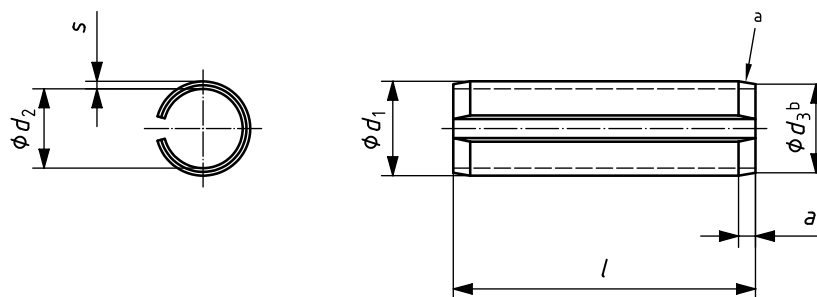

^a For slotted spring-type straight pins with a nominal diameter $d_1 \geq 10$ mm, a single chamfer configuration is optional at the discretion of the supplier.

^b $d_3 < d_{1, \text{nom}}$

NOTE For non-interlocking slotted spring-type straight pins (slot type N), see Clauses 5 and 6.

Figure 1 — Slotted spring-type straight pins, light duty

Table 1 — Dimensions

d_1	nom.		2	2,5	3	3,5	4	4,5	5	6	8	10	12	
	before mounting	max.	min.	2,4	2,9	3,5	4,0	4,6	5,1	5,6	6,7	8,8	10,8	12,8
d_2	before mounting ^a		1,9	2,3	2,7	3,1	3,4	3,9	4,4	4,9	7,0	8,5	10,5	
	a	max.	min.	0,4	0,45	0,45	0,5	0,7	0,7	0,7	0,9	1,8	2,4	2,4
		0,2	0,25	0,25	0,3	0,5	0,5	0,5	0,5	0,7	1,5	2,0	2,0	
s				0,2	0,25	0,3	0,35	0,5	0,5	0,5	0,75	0,75	1,0	1,0
Minimum shear strength, double^b kN			1,5	2,4	3,5	4,6	8	8,8	10,4	18	24	40	48	
l^c														
nom.	min.	max.												
4	3,75	4,25												
5	4,75	5,25												
6	5,75	6,25												
8	7,75	8,25												
10	9,75	10,25												
12	11,5	12,5												
14	13,5	14,5												
16	15,5	16,5												
18	17,5	18,5												
20	19,5	20,5												
22	21,5	22,5												
24	23,5	24,5												
26	25,5	26,5												
28	27,5	28,5												
30	29,5	30,5												
32	31,5	32,5												
35	34,5	35,5												
40	39,5	40,5												
45	44,5	45,5												
50	49,5	50,5												
55	54,25	55,75												
60	59,25	60,75												
65	64,25	65,75												
70	69,25	70,75												
75	74,25	75,75												
80	79,25	80,75												
85	84,25	85,75												
90	89,25	90,75												
95	94,25	95,75												
100	99,25	100,75												
120	119,25	120,75												
140	139,25	140,75												
160	159,25	160,75												
180	179,25	180,75												
200	199,25	200,75												

Range
of

^a For reference only.
^b Applies to steel and martensitic corrosion resistant steel products only. For austenitic stainless pins, no double shear strength values are specified.
^c For nominal lengths above 200 mm, steps of 20 mm.

4 Application

The diameter of the hole into which the spring pin is to be inserted shall be equal to the nominal diameter, d_1 , of the mating pin and to tolerance class H12.

When mounted in the smallest permitted hole, the slot shall not fully close.

5 Requirements and reference International Standards

See Table 2.

Table 2 — Requirements and reference International Standards

	Steel		Austenitic stainless steel	Martensitic stainless steel
	St		A	C
Material^a	Steel (St) at the supplier's discretion, either:		Chemical composition limits (check analysis) %	
	<p>Plain carbon steel with C \geq 0,65 % Mn \geq 0,60 % (check analysis) Hardened and tempered to a Vickers hardness of 420 HV to 520 HV or austempered to a Vickers hardness of 500 HV to 560 HV.</p> <p>or</p> <p>Silicon manganese steel with C \geq 0,5 % Si \geq 1,5 % Mn \geq 0,7 % (check analysis) Hardened and tempered to a Vickers hardness of 420 HV to 560 HV.</p> <p>Hardness testing in accordance with ISO 6507-1.</p>	<p>C \leq 0,15 Mn \leq 2,00 Si \leq 1,50 Cr 16 to 20 N 6 to 12 P \leq 0,045 S \leq 0,03 Mo \leq 0,8</p>	<p>C \geq 0,15 Mn \leq 1,00 Si \leq 1,00 Cr 11,5 to 14 Ni \leq 1,00 P \leq 0,04 S \leq 0,03</p>	<p>Cold worked</p> <p>Hardened and tempered to a Vickers hardness of 440 HV to 560 HV</p> <p>Hardness testing in accordance with ISO 6507-1.</p>
Slot	Normal case	Form and width of slot at the discretion of the supplier.		
	Type N	Non-interlocking pins with a form and/or width of slot which guarantees no interlocking may be supplied by special agreement between the customer and supplier.		
Surface finish	<p>Plain, i.e. pins to be supplied in natural finish, treated with a protective lubricant, unless otherwise specified by agreement between the customer and the supplier.</p> <p>If pins are surface coated, appropriate plating or coating processes should be employed to avoid hydrogen embrittlement. Due to the risk of hydrogen embrittlement, pins should not be electroplated or phosphate-coated. If electroplating or phosphate coating is required for corrosion prevention, by agreement between the customer and the supplier, it is mandatory that the pins be baked immediately after plating to minimize the risk of hydrogen embrittlement; see also information on hydrogen embrittlement relief in ISO 4042. Nevertheless, freedom from hydrogen embrittlement is not absolutely guaranteed.</p> <p>All tolerances shall apply prior to the application of a plating or coating.</p>		<p>Plain, i. e. pins to be supplied in natural finish.</p>	
Workmanship	Pins shall be free of irregularities or detrimental defects. No burrs shall appear on any part of the pin.			
Shear strength test	The test shall be in accordance with ISO 8749.			
Acceptability	The acceptance procedure is specified in ISO 3269.			
^a For other materials, as agreed between the customer and supplier.				

6 Designation

EXAMPLE 1 A slotted spring-type straight pin, light duty, with nominal diameter $d_1 = 6$ mm and nominal length $l = 30$ mm, made of steel (St), is designated as follows:

Spring pin ISO 13337-6 × 30-St

EXAMPLE 2 A non-interlocking slotted spring-type straight pin (N), light duty, with nominal diameter $d_1 = 6$ mm and nominal length $l = 30$ mm, made of martensitic stainless steel (C), is designated as follows:

Spring pin ISO 13337-6 × 30-N-C

Bibliography

- [1] ISO 8752, *Spring-type straight pins — Slotted, heavy duty*

BSI - British Standards Institution

BSI is the independent national body responsible for preparing British Standards. It presents the UK view on standards in Europe and at the international level. It is incorporated by Royal Charter.

Revisions

British Standards are updated by amendment or revision. Users of British Standards should make sure that they possess the latest amendments or editions.

It is the constant aim of BSI to improve the quality of our products and services. We would be grateful if anyone finding an inaccuracy or ambiguity while using this British Standard would inform the Secretary of the technical committee responsible, the identity of which can be found on the inside front cover. Tel: +44 (0)20 8996 9000. Fax: +44 (0)20 8996 7400.

BSI offers members an individual updating service called PLUS which ensures that subscribers automatically receive the latest editions of standards.

Buying standards

Orders for all BSI, international and foreign standards publications should be addressed to Customer Services. Tel: +44 (0)20 8996 9001. Fax: +44 (0)20 8996 7001 Email: orders@bsigroup.com You may also buy directly using a debit/credit card from the BSI Shop on the Website <http://www.bsigroup.com/shop>

In response to orders for international standards, it is BSI policy to supply the BSI implementation of those that have been published as British Standards, unless otherwise requested.

Information on standards

BSI provides a wide range of information on national, European and international standards through its Library and its Technical Help to Exporters Service. Various BSI electronic information services are also available which give details on all its products and services. Contact Information Centre. Tel: +44 (0)20 8996 7111 Fax: +44 (0)20 8996 7048 Email: info@bsigroup.com

Subscribing members of BSI are kept up to date with standards developments and receive substantial discounts on the purchase price of standards. For details of these and other benefits contact Membership Administration. Tel: +44 (0)20 8996 7002 Fax: +44 (0)20 8996 7001 Email: membership@bsigroup.com

Information regarding online access to British Standards via British Standards Online can be found at <http://www.bsigroup.com/BSOL>

Further information about BSI is available on the BSI website at <http://www.bsigroup.com>.

Copyright

Copyright subsists in all BSI publications. BSI also holds the copyright, in the UK, of the publications of the international standardization bodies. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI.

This does not preclude the free use, in the course of implementing the standard, of necessary details such as symbols, and size, type or grade designations. If these details are to be used for any other purpose than implementation then the prior written permission of BSI must be obtained.

Details and advice can be obtained from the Copyright and Licensing Manager. Tel: +44 (0)20 8996 7070 Email: copyright@bsigroup.com