

标准分享站
anystandards.com

1341-76

4851903 0002429 8

K-23-03

INTERNATIONAL STANDARD



1341

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION · МЕЖДУНАРОДНАЯ ОРГАНИЗАЦИЯ ПО СТАНДАРТИЗАЦИИ · ORGANISATION INTERNATIONALE DE NORMALISATION

Straight bevel gears — Information to be given to the manufacturer by the purchaser in order to obtain the gear required

Engrenages coniques — Indications à fournir au tailleur d'engrenages par le client pour obtenir la denture désirée

First edition — 1976-08-01

UDC 621.833.2 : 658.74

Ref. No. ISO 1341-1976 (E)

Descriptors : gears, bevel gears, engineering drawings, specifications.

Price based on 2 pages

FOREWORD

ISO (the International Organization for Standardization) is a worldwide federation of national standards institutes (ISO Member Bodies). The work of developing International Standards is carried out through ISO Technical Committees. Every Member Body interested in a subject for which a Technical Committee has been set up has the right to be represented on that Committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work.

Draft International Standards adopted by the Technical Committees are circulated to the Member Bodies for approval before their acceptance as International Standards by the ISO Council.

Prior to 1972, the results of the work of the Technical Committees were published as ISO Recommendations; these documents are now in the process of being transformed into International Standards. As part of this process, Technical Committee ISO/TC 60 has reviewed ISO Recommendation R 1341 and found it technically suitable for transformation. International Standard ISO 1341 therefore replaces ISO Recommendation R 1341-1971 to which it is technically identical.

ISO Recommendation R 1341 was approved by the Member Bodies of the following countries :

| | | |
|---------------------|-----------------------|----------------|
| Australia | India | Spain |
| Austria | Israel | Sweden |
| Belgium | Italy | Switzerland |
| Chile | Japan | Thailand |
| Czechoslovakia | Korea, Rep. of | Turkey |
| Egypt, Arab Rep. of | Netherlands | United Kingdom |
| Finland | New Zealand | U.S.S.R. |
| France | Paraguay | Yugoslavia |
| Germany | Poland | |
| Greece | South Africa, Rep. of | |

The Member Body of the following country expressed disapproval of the Recommendation on technical grounds :

Hungary

The Member Body of the following country disapproved the transformation of ISO/R 1341 into an International Standard :

Germany

Straight bevel gears — Information to be given to the manufacturer by the purchaser in order to obtain the gear required

1 SCOPE AND FIELD OF APPLICATION

This International Standard specifies the information which should be stated on all straight bevel gear drawings. For each particular case they should be completed by such information as may be necessary or useful.

2 REFERENCES

ISO/R 468, *Surface roughness*.

ISO 677, *Basic rack of straight bevel gears for general engineering and heavy engineering*.

ISO 1302, *Technical drawings — Method of indicating surface texture on drawings*.


ISO 2203, *Technical drawings — Conventional representation of gears*.

ISO . . ., *Conical gears — ISO system of accuracy*.¹⁾

3 GENERAL DIMENSIONS AND CHARACTERISTICS TO BE INDICATED ON THE DRAWING

- Tip diameter and tolerance
- Facewidth
- Tip angle
- Angle of the back cone (and, if applicable, inner cone)
- Bore diameter and tolerance (or diameter and tolerance for the part of the shaft used for the setting on the cutting machine)
- Locating face(s)

- Distance to the locating face :
 - a : from the pitch cone apex (locating distance) and tolerance
 - b : from the pitch circle
 - c : from the tip circle of the tip cone (tip distance) and tolerance
 - d : from the tip circle of the inner cone
 - e : from the inner face
- Surface finish of the tooth flank surfaces and, if applicable, of the root surface and of the fillets²⁾

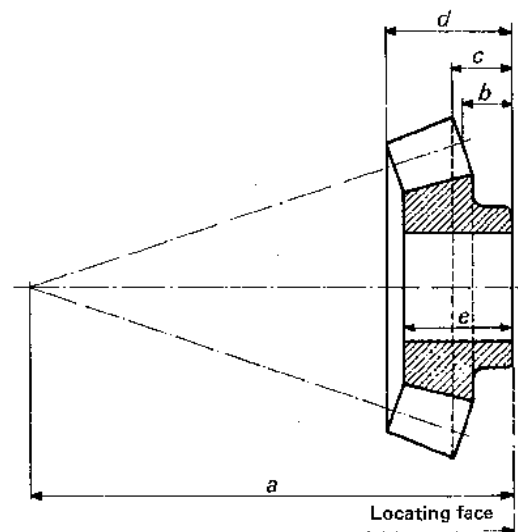

1) In preparation.

2) Specifications concerning surface texture and the symbols used should be in accordance with ISO/R 468 and ISO 1302.

标准分享站
anystandards.com

SHOWN IN A TABLE

Information should preferably be given in the top-left-hand corner of the drawing :

- Module of diametral pitch
- Number of teeth (for a sector : total number of teeth of the gear from which the sector is taken)
- Basic rack (give the number of the corresponding national standard or the pressure angle of 20°. If the basic rack differs from the standard rack, its characteristics should be specified, preferably by a figure)
- Reference diameter
- Reference cone angle
- Cone distance
- Addendum modification coefficient (to be expressed in unit module)
- Root angle or dedendum angle
- Tooth thickness : basic value and upper and lower deviations
- All useful information on tolerances (see ISO ...)
- Shaft angle of the gear pair and tolerance
- Number of teeth and drawing number of the mating gear.


NOTE - The features outlined in clauses 3 and 4 are those which are considered essential. Any other useful information should be given to the gear manufacturer for the manufacture and inspection of the teeth as required by the particular form and characteristics of the gear.

In particular :

- a) the necessity of ensuring firm location of the body of the gear on the cutting machine will require that the support and clamping faces (which should be perpendicular to the axis) and their permissible axial run-out should be indicated;
- b) for shafted pinions and wheels the bores of which will not be used as reference for centring, it is necessary to specify the maximum radial run-out of the surface which serves as datum for checking the centring before commencement of cutting.

5 EXAMPLE

Dimensions in millimetres

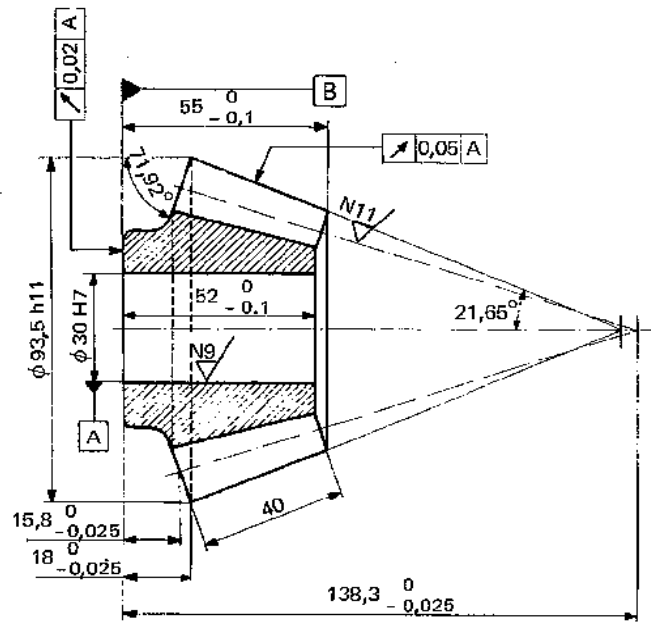

B : locating face

| Characteristics of the teeth | |
|--|---------------------------------|
| Module | 5 |
| Number of teeth | 16 |
| Basic rack | ISO 677 - 20° |
| Reference diameter | 80 mm |
| Reference cone angle | 18,08° or 18° 4' 48" |
| Cone distance | 128,87 mm |
| Addendum modification coefficient | 0,42 |
| Root angle | 16,38° or 16° 22' 48" |
| Tooth thickness : Constant chord/Addendum | 8,54 - 0,05 / 5,95 mm - 0,08 |
| Quality class ¹⁾ | |
| Shaft angle | 90° |
| Mating gear | z = 49 drawing No. 54321 |
| 2) | |
| 2) | |

1) According to ISO ... or to a corresponding national standard.
2) Complementary information which may be necessary or useful.