

INTERNATIONAL  
STANDARD

ISO  
4014

supersedes DIN 931

Third edition  
1999-09-01

SWS 2100

---

---

**Hexagon head bolts — Product grades A  
and B**

*Vis à tête hexagonale partiellement filetées — Grades A et B*



Reference number  
ISO 4014:1999(E)

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 3.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

International Standard ISO 4014 was prepared by Technical Committee ISO/TC 2, *Fasteners*.

This third edition cancels and replaces the second edition (ISO 4014:1988) which has been technically revised.

© ISO 1999

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Organization for Standardization  
Case postale 56 • CH-1211 Genève 20 • Switzerland  
Internet iso@iso.ch

Printed in Switzerland

## Introduction

This International Standard is part of the complete ISO product standard series on external hexagon drive fasteners. The series comprises:

- a) hexagon head bolts (ISO 4014 to ISO 4016 and ISO 8765);
- b) hexagon head screws (ISO 4017, ISO 4018 and ISO 8676);
- c) hexagon nuts (ISO 4032 to ISO 4036, ISO 8673 to ISO 8675);
- d) hexagon bolts with flange (ISO 4162 and ISO 15071);
- e) hexagon nuts with flange (ISO 4161 and ISO 10663);
- f) structural bolts and nuts (ISO 4775, ISO 7411 to ISO 7414 and ISO 7417).



# Hexagon head bolts — Product grades A and B

## 1 Scope

This International Standard specifies the characteristics of hexagon head bolts with threads from M1,6 up to and including M64, of product grade A for threads M1,6 to M24 and nominal lengths up to and including  $10d$  or 150 mm, whichever is shorter and product grade B for threads over M24 or nominal lengths over  $10d$  or 150 mm, whichever is shorter.

If, in special cases, specifications other than those listed in this International Standard are required, they should be selected from existing International Standards, for example ISO 724, ISO 888, ISO 898-1, ISO 965-1, ISO 3506-1, ISO 4753 and ISO 4759-1.

## 2 Normative references

The following normative documents contain provisions which, through reference in this text, constitute provisions of this International Standard. For dated references, subsequent amendments to, or revisions of, any of these publications do not apply. However, parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent editions of the normative documents indicated below. For undated references, the latest edition of the normative document referred to applies. Members of ISO and IEC maintain registers of currently valid International Standards.

ISO 225:1983, *Fasteners — Bolts, screws, studs and nuts — Symbols and designations of dimensions.*

ISO 724:1993, *ISO general-purpose metric screw threads — Basic dimensions.*

ISO 888:1976, *Bolts, screws and studs — Nominal lengths, and thread lengths for general purpose bolts.*

ISO 898-1:1999, *Mechanical properties of fasteners made of carbon steel and alloy steel — Part 1: Bolts, screws and studs.*

ISO 965-1:1998, *ISO general purpose metric screw threads — Tolerances — Part 1: Principles and basic data.*

ISO 3269:—<sup>1)</sup>, *Fasteners — Acceptance inspection.*

ISO 3506-1:1997, *Mechanical properties of corrosion-resistant stainless-steel fasteners — Part 1: Bolts, screws and studs.*

ISO 4017:1999, *Hexagon head screws — Product grades A and B.*

ISO 4042:1999, *Fasteners — Electroplated coatings.*

ISO 4753:—<sup>2)</sup>, *Fasteners — Ends of parts with external metric ISO thread.*

---

<sup>1)</sup> To be published. (Revision of ISO 3269:1988)

<sup>2)</sup> To be published. (Revision of ISO 4753:1983)

ISO 4759-1:—<sup>3)</sup>, *Tolerances for fasteners — Part 1: Bolts, screws, studs and nuts — Product grades A, B and C.*

ISO 6157-1:1988, *Fasteners — Surface discontinuities — Part 1: Bolts, screws and studs for general requirements.*

ISO 8839:1986, *Mechanical properties of fasteners — Bolts, screws, studs and nuts made of non-ferrous metals.*

ISO 8992:1986, *Fasteners — General requirements for bolts, screws, studs and nuts.*

ISO 10683:—<sup>4)</sup>, *Fasteners — Non-electrolytically applied zinc flake coatings.*

### 3 Dimensions

See Figure 1 and Tables 1 and 2



Symbols and description of dimensions are defined in ISO 225.

---

<sup>3)</sup> To be published. (Revision of ISO 4759-1:1978)

<sup>4)</sup> To be published.

Dimensions in millimetres

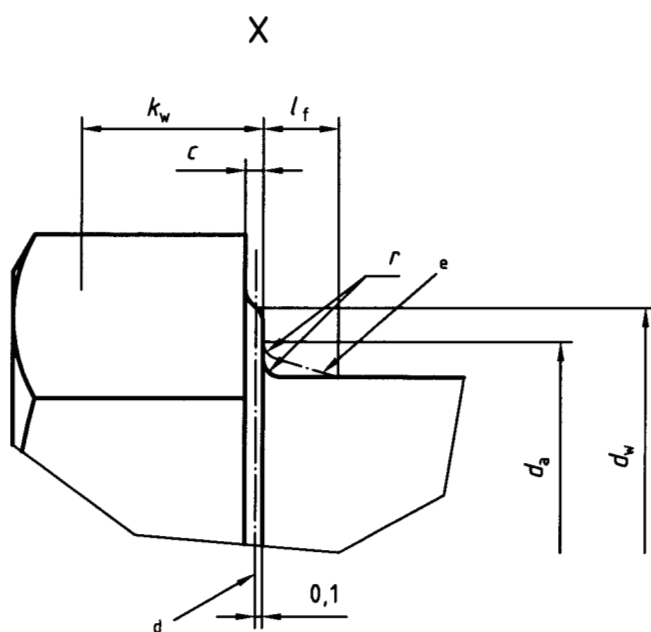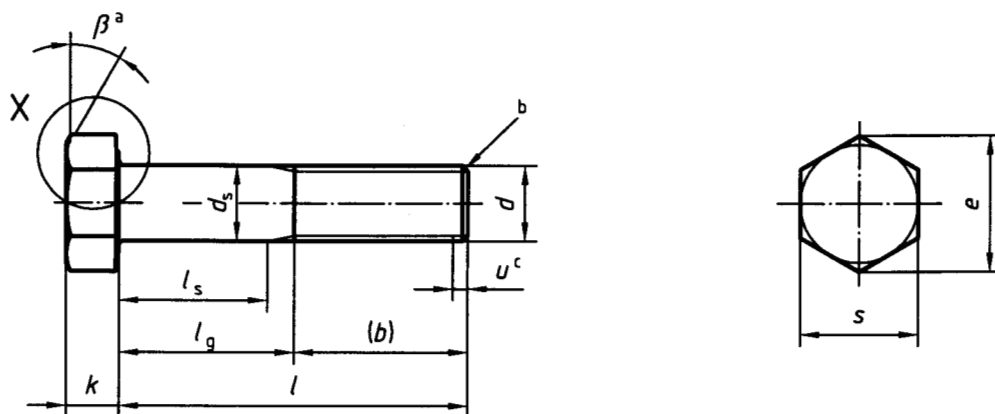

- a  $\beta = 15^\circ$  to  $30^\circ$
- b Point shall be chamfered or for threads  $\leq M4$  may be as-rolled (sheared end) (see ISO 4753)
- c Incomplete thread  $u \leq 2P$
- d Referee datum for  $d_w$
- e Maximum underhead fillet

Figure 1

Table 1 — Preferred threads

Dimensions in millimetres

Thread ( <i>d</i> )		M1,6	M2	M2,5	M3	M4	M5	M6	M8	M10	
<i>p</i> <sup>a</sup>		0,35	0,4	0,45	0,5	0,7	0,8	1	1,25	1,5	
<i>b</i> ref.	b	9	10	11	12	14	16	18	22	26	
	c	15	16	17	18	20	22	24	28	32	
	d	28	29	30	31	33	35	37	41	45	
<i>c</i>	max.	0,25	0,25	0,25	0,40	0,40	0,50	0,50	0,60	0,60	
	min.	0,10	0,10	0,10	0,15	0,15	0,15	0,15	0,15	0,15	
<i>d</i> <sub>a</sub>	max.	2	2,6	3,1	3,6	4,7	5,7	6,8	9,2	11,2	
<i>d</i> <sub>s</sub>	nom. = max.	1,60	2,00	2,50	3,00	4,00	5,00	6,00	8,00	10,00	
	Product grade	A min.	1,46	1,86	2,36	2,86	3,82	4,82	5,82	7,78	9,78
		B	1,35	1,75	2,25	2,75	3,70	4,70	5,70	7,64	9,64
<i>d</i> <sub>w</sub>	Product grade	A min.	2,27	3,07	4,07	4,57	5,88	6,88	8,88	11,63	14,63
		B	2,3	2,95	3,95	4,45	5,74	6,74	8,74	11,47	14,47
<i>e</i>	Product grade	A min.	3,41	4,32	5,45	6,01	7,66	8,79	11,05	14,38	17,77
		B	3,28	4,18	5,31	5,88	7,50	8,63	10,89	14,20	17,59
<i>l</i> <sub>f</sub>	max.	0,6	0,8	1	1	1,2	1,2	1,4	2	2	
	nom.	1,1	1,4	1,7	2	2,8	3,5	4	5,3	6,4	
<i>k</i>	Product grade	A max.	1,225	1,525	1,825	2,125	2,925	3,65	4,15	5,45	6,58
		min.	0,975	1,275	1,575	1,875	2,675	3,35	3,85	5,15	6,22
	Product grade	B max.	1,3	1,6	1,9	2,2	3,0	3,26	4,24	5,54	6,69
		min.	0,9	1,2	1,5	1,8	2,6	2,35	3,76	5,06	6,11
<i>k</i> <sub>w</sub> <sup>e</sup>	Product grade	A min.	0,68	0,89	1,10	1,31	1,87	2,35	2,70	3,61	4,35
		B	0,63	0,84	1,05	1,26	1,82	2,28	2,63	3,54	4,28
<i>r</i>	min.	0,1	0,1	0,1	0,1	0,2	0,2	0,25	0,4	0,4	
<i>s</i>	nom. = max.	3,20	4,00	5,00	5,50	7,00	8,00	10,00	13,00	16,00	
	Product grade	A min.	3,02	3,82	4,82	5,32	6,78	7,78	9,78	12,73	15,73
		B	2,90	3,70	4,70	5,20	6,64	7,64	9,64	12,57	15,57



nom.	Product grade				$l_s$ and $l_g^{fg}$																		
	A		B		$l_g$ min.	$l_g$ max.	$l_s$ min.	$l_g$ max.	$l_s$ min.	$l_g$ max.	$l_s$ min.	$l_g$ max.	$l_s$ min.	$l_g$ max.	$l_s$ min.	$l_g$ max.	$l_s$ min.	$l_g$ max.	$l_s$ min.	$l_g$ max.	$l_s$ min.	$l_g$ max.	
	min.	max.	min.	max.																			
12	11,65	12,35	—	—	1,2	3																	
16	15,65	16,35	—	—	5,2	7	4	6	2,75	5													
20	19,58	20,42	18,95	21,05			8	10	6,75	9	5,5	8											
25	24,58	25,42	23,95	26,05					11,75	14	10,5	13	7,5	11	5	9							
30	29,58	30,42	28,95	31,05							15,5	18	12,5	16	10	14	7	12					
35	34,5	35,5	33,75	36,25									17,5	21	15	19	12	17					
40	39,5	40,5	38,75	41,25									22,5	26	20	24	17	22	11,75	18			
45	44,5	45,5	43,75	46,25											25	29	22	27	16,75	23	11,5	19	
50	49,5	50,5	48,75	51,25											30	34	27	32	21,75	28	16,5	24	
55	54,4	55,6	53,5	56,5													32	37	26,75	33	21,5	29	
60	59,4	60,6	58,5	61,5													37	42	31,75	38	26,5	34	
65	64,4	65,6	63,5	66,5															36,75	43	31,5	39	
70	69,4	70,6	68,5	71,5																41,75	48	36,5	44
80	79,4	80,6	78,5	81,5																51,75	58	46,5	54
90	89,3	90,7	88,25	91,75																		56,5	64
100	99,3	100,7	98,25	101,75																		66,5	74
110	109,3	110,7	108,25	111,75																			
120	119,3	120,7	118,25	121,75																			

For sizes above the solid, boldface stepped line ISO 4017 is recommended

Table 1 (continued)

Dimensions in millimetres

Thread ( <i>d</i> )		M12	M16	M20	M24	M30	M36	M42	M48	M56	M64	
$p^a$		1,75	2	2,5	3	3,5	4	4,5	5	5,5	6	
<i>b</i> ref.	b	30	38	46	54	66	—	—	—	—	—	
	c	36	44	52	60	72	84	96	108	—	—	
	d	49	57	65	73	85	97	109	121	137	153	
<i>c</i>	max.	0,60	0,8	0,8	0,8	0,8	0,8	1,0	1,0	1,0	1,0	
	min.	0,15	0,2	0,2	0,2	0,2	0,2	0,3	0,3	0,3	0,3	
$d_a$	max.	13,7	17,7	22,4	26,4	33,4	39,4	45,6	52,6	63	71	
$d_s$	nom. = max.	12,00	16,00	20,00	24,00	30,00	36,00	42,00	48,00	56,00	64,00	
	Product grade	A min.	11,73	15,73	19,67	23,67	—	—	—	—	—	—
		B	11,57	15,57	19,48	23,48	29,48	35,38	41,38	47,38	55,26	63,26
$d_w$	Product grade	A min.	16,63	22,49	28,19	33,61	—	—	—	—	—	—
		B	16,47	22	27,7	33,25	42,75	51,11	59,95	69,45	78,66	88,16
<i>e</i>	Product grade	A min.	20,03	26,75	33,53	39,98	—	—	—	—	—	—
		B	19,85	26,17	32,95	39,55	50,85	60,79	71,3	82,6	93,56	104,86
$l_f$	max.	3	3	4	4	6	6	8	10	12	13	
	nom.	7,5	10	12,5	15	18,7	22,5	26	30	35	40	
<i>k</i>	Product grade	A max.	7,68	10,18	12,715	15,215	—	—	—	—	—	—
		min.	7,32	9,82	12,285	14,785	—	—	—	—	—	—
	Product grade	B max.	7,79	10,29	12,85	15,35	19,12	22,92	26,42	30,42	35,5	40,5
		min.	7,21	9,71	12,15	14,65	18,28	22,08	25,58	29,58	34,5	39,5
$k_w^b$	Product grade	A min.	5,12	6,87	8,6	10,35	—	—	—	—	—	—
		B	5,05	6,8	8,51	10,26	12,8	15,46	17,91	20,71	24,15	27,65
<i>r</i>	min.	0,6	0,6	0,8	0,8	1	1	1,2	1,6	2	2	
<i>s</i>	nom. = max.	18,00	24,00	30,00	36,00	46	55,0	65,0	75,0	85,0	95,0	
	Product grade	A min.	17,73	23,67	29,67	35,38	—	—	—	—	—	—
		B	17,57	23,16	29,16	35,00	45	53,8	63,1	73,1	82,8	92,8

		Product grade																				
		A		B																		
nom.	min.	max.	min.	max.	$l_s$ min.	$l_g$ max.	$l_s$ min.	$l_g$ max.	$l_s$ min.	$l_g$ max.	$l_s$ min.	$l_g$ max.	$l_s$ min.	$l_g$ max.	$l_s$ min.	$l_g$ max.	$l_s$ min.	$l_g$ max.	$l_s$ min.	$l_g$ max.	$l_s$ min.	$l_g$ max.
50	49,5	50,5	—	—	11,25	20	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
55	54,4	55,6	53,5	56,5	16,25	25	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
60	59,4	60,6	58,5	61,5	21,25	30	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
65	64,4	65,6	63,5	66,5	26,25	35	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
70	69,4	70,6	68,5	71,5	31,25	40	17	27	—	—	—	—	—	—	—	—	—	—	—	—	—	—
80	79,4	80,6	78,5	81,5	41,25	50	32	42	21,5	34	—	—	—	—	—	—	—	—	—	—	—	—
90	89,3	90,7	88,25	91,75	51,25	60	42	52	31,5	44	21	36	—	—	—	—	—	—	—	—	—	—
100	99,3	100,7	98,25	101,75	61,25	70	52	62	41,5	54	31	46	—	—	—	—	—	—	—	—	—	—
110	109,3	110,7	108,25	111,75	71,25	80	62	72	51,5	64	41	56	—	—	—	—	—	—	—	—	—	—
120	119,3	120,7	118,25	121,75	81,25	90	72	82	61,5	74	51	66	—	—	—	—	—	—	—	—	—	—
130	129,2	130,8	128	132	—	—	76	86	65,5	78	55	70	—	—	—	—	—	—	—	—	—	—
140	139,2	140,8	138	142	—	—	86	96	75,5	88	65	80	—	—	—	—	—	—	—	—	—	—
150	149,2	150,8	148	152	—	—	96	106	85,5	98	75	90	—	—	—	—	—	—	—	—	—	—
160	—	—	158	162	—	—	106	116	95,5	108	85	100	—	—	—	—	—	—	—	—	—	—
180	—	—	178	182	—	—	—	—	115,5	128	105	120	—	—	—	—	—	—	—	—	—	—
200	—	—	197,7	202,3	—	—	—	—	135,5	148	125	140	—	—	—	—	—	—	—	—	—	—
220	—	—	217,7	222,3	—	—	—	—	—	—	132	147	—	—	—	—	—	—	—	—	—	—
240	—	—	237,7	242,3	—	—	—	—	—	—	152	167	—	—	—	—	—	—	—	—	—	—
260	—	—	257,4	262,6	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
280	—	—	277,4	282,6	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
300	—	—	297,4	302,6	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
320	—	—	317,15	322,85	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
340	—	—	337,15	342,85	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
360	—	—	357,15	362,85	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
380	—	—	377,15	382,85	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
400	—	—	397,15	402,85	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
420	—	—	416,85	423,15	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
440	—	—	436,85	443,15	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
460	—	—	456,85	463,15	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
480	—	—	476,85	483,15	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
500	—	—	496,85	503,15	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

NOTE Popular lengths are defined in terms of  $l_s$  and  $l_g$ :

— for product grade A, above the dashed, stepped line;

— for product grade B, below this stepped line.

a  $P$  is the pitch of the thread.

b For lengths  $l_{nom} \approx 125$  mm.

c For lengths  $125 \text{ mm} < l_{nom} \leq 200$  mm.

d For lengths  $l_{nom} > 200$  mm.

e  $k_w, \text{min} = 0,7 k_{\text{min}}$

f  $l_g, \text{max} = l_{nom} - b$

$l_s, \text{min} = l_g, \text{max} - 5P$

g  $l_g$  is the minimum grip length.

Table 2 — Non-preferred threads

Dimensions in millimetres

Thread ( <i>d</i> )			M3,5	M14	M18	M22	M27
<i>p</i> <sup>a</sup>			0,6	2	2,5	2,5	3
<i>b</i> ref.	<i>b</i>		13	34	42	50	60
	<i>c</i>		19	40	48	56	66
	<i>d</i>		32	53	61	69	79
<i>c</i>	max.		0,40	0,60	0,8	0,8	0,8
	min.		0,15	0,15	0,2	0,2	0,2
<i>d</i> <sub>a</sub>	max.		4,1	15,7	20,2	24,4	30,4
<i>d</i> <sub>s</sub>	nom. = max.		3,50	14,00	18,00	22,00	27,00
	Product grade	A min.	3,32	13,73	17,73	21,67	—
		B	3,20	13,57	17,57	21,48	26,48
<i>d</i> <sub>w</sub>	Product grade	A min.	5,07	19,64	25,34	31,71	—
		B	4,95	19,15	24,85	31,35	38
<i>e</i>	Product grade	A min.	6,58	23,36	30,14	37,72	—
		B	6,44	22,78	29,56	37,29	45,2
<i>l</i> <sub>f</sub>	max.		1	3	3	4	6
<i>k</i>	nom.		2,4	8,8	11,5	14	17
	Product grade	A max.	2,525	8,98	11,715	14,215	—
		min.	2,275	8,62	11,285	13,785	—
	Product grade	B max.	2,6	9,09	11,85	14,35	17,35
		min.	2,2	8,51	11,15	13,65	16,65
<i>k</i> <sub>w</sub> <sup>e</sup>	Product grade	A min.	1,59	6,03	7,9	9,65	—
		B	1,54	5,96	7,81	9,56	11,66
<i>r</i>	min.		0,1	0,6	0,6	0,8	1
<i>s</i>	nom. = max.		6,00	21,00	27,00	34,00	41
	Product grade	A min.	5,82	20,67	26,67	33,38	—
		B	5,70	20,16	26,16	33,00	40

Product grade					<i>l</i> <sub>s</sub> and <i>l</i> <sub>g</sub> <sup>g</sup>											
A		B			<i>l</i> <sub>s</sub>		<i>l</i> <sub>g</sub>		<i>l</i> <sub>s</sub>		<i>l</i> <sub>g</sub>		<i>l</i> <sub>s</sub>		<i>l</i> <sub>g</sub>	
nom.	min.	max.	min.	max.	min.	max.	min.	max.	min.	max.	min.	max.	min.	max.	min.	max.
20	19,58	20,42	—	—	4	7										
25	24,58	25,42	—	—	9	12										
30	29,58	30,42	—	—	14	17										
35	34,5	35,5	—	—	19	22										
40	39,5	40,5	38,75	41,25												
45	44,5	45,5	43,75	46,25												
50	49,5	50,5	48,75	51,25												
55	54,4	55,6	53,5	56,5												
60	59,4	60,6	58,5	61,5			16	26								
65	64,4	65,6	63,5	66,5			21	31								
70	69,4	70,6	68,5	71,5			26	36	15,5	28						
80	79,4	80,6	78,5	81,5			36	46	25,5	38						
90	89,3	90,7	88,25	91,75			46	56	35,5	48	27,5	40				
100	99,3	100,7	98,25	101,75			56	66	45,5	58	37,5	50	25	40		
110	109,3	110,7	108,25	111,75			66	76	55,5	68	47,5	60	35	50		
120	119,3	120,7	118,25	121,75			76	86	65,5	78	57,5	70	45	60		
130	129,2	130,8	128	132			80	90	69,5	82	61,5	74	49	64		
140	139,2	140,8	138	142			90	100	79,5	92	71,5	84	59	74		
150	149,2	150,8	148	152					89,5	102	81,5	94	69	84		
160	—	—	158	162					99,5	112	91,5	104	79	94		
180	—	—	178	182					119,5	132	111,5	124	99	114		
200	—	—	197,7	202,3							131,5	144	119	134		
220	—	—	217,7	222,3							138,5	151	126	141		
240	—	—	237,7	242,3									146	161		
260	—	—	257,4	262,6									166	181		

For sizes above the dashed, boldface stepped line ISO 4017 is recommended.

Thread (d)		M33	M39	M45	M52	M60										
$p^a$		3,5	4	4,5	5	5,5										
$b$ ref	b	—	—	—	—	—										
	c	78	90	102	116	—										
	d	91	103	115	129	145										
$c$	max.	0,8	1,0	1,0	1,0	1,0										
	min.	0,2	0,3	0,3	0,3	0,3										
$d_a$	max.	36,4	42,4	48,6	56,6	67										
$d_s$	nom. = max.	33,00	39,00	45,00	52,00	60,00										
	Product grade	A min.	—	—	—	—										
$d_w$	Product grade	B	32,38	38,38	44,38	51,26	59,26									
	A min.	—	—	—	—	—										
$e$	Product grade	B	46,55	55,86	64,7	74,2	83,41									
	A min.	—	—	—	—	—										
$l_f$	Product grade	B	55,37	66,44	76,95	88,25	99,21									
	A min.	—	—	—	—	—										
$k$	max.	6	6	8	10	12										
	nom.	21	25	28	33	38										
	Product grade	A max.	—	—	—	—										
	min.	—	—	—	—	—										
$k_w^e$	Product grade	B max.	21,42	25,42	28,42	33,5	38,5									
	A min.	—	—	—	—	—										
$r$	Product grade	B min.	20,58	24,58	27,58	32,5	37,5									
	A min.	—	—	—	—	—										
$s$	Product grade	B	14,41	17,21	19,31	22,75	26,25									
	A min.	—	—	—	—	—										
$s$	nom. = max.	50	60,0	70,0	80,0	90,0										
	Product grade	B	49	58,8	68,1	78,1	87,8									
Product grade																
A																
B																
		$l_s$ and $l_g^{fg}$														
		$l$														
nom.	min.	max.	min.	max.	$l_s$ min.	$l_g$ max.	$l_s$ min.	$l_g$ max.	$l_s$ min.	$l_g$ max.	$l_s$ min.	$l_g$ max.	$l_s$ min.	$l_g$ max.	$l_s$ min.	$l_g$ max.
130	129,2	130,8	128	132	34,5	52	For sizes above the solid, boldface stepped line ISO 4017 is recommended									
140	139,2	140,8	138	142	44,5	62										
150	149,2	150,8	148	152	54,5	72	40	60								
160	—	—	158	162	64,5	82	50	70								
180	—	—	178	182	84,5	102	70	90	55,5	78						
200	—	—	197,7	202,3	104,5	122	90	110	75,5	98	59	84				
220	—	—	217,7	222,3	111,5	129	97	117	82,5	105	66	91				
240	—	—	237,7	242,3	131,5	149	117	137	102,5	125	86	111	67,5	95		
260	—	—	257,4	262,6	151,5	169	137	157	122,5	145	106	131	87,5	115		
280	—	—	277,4	282,6	171,5	189	157	177	142,5	165	126	151	107,5	135		
300	—	—	297,4	302,6	191,5	209	177	197	162,5	185	146	171	127,5	155		
320	—	—	317,15	322,85	211,5	229	197	217	182,5	205	166	191	147,5	175		
340	—	—	337,15	342,85					202,5	225	186	211	167,5	195		
360	—	—	357,15	362,85					237	257	222,5	245	206	231	187,5	215
380	—	—	377,15	382,85					257	277	242,5	265	226	251	207,5	235
400	—	—	397,15	402,85							262,5	285	246	271	227,5	255
420	—	—	416,85	423,15							282,5	305	266	291	247,5	275
440	—	—	436,85	443,15							302,5	325	286	311	267,5	295
460	—	—	456,85	463,15									306	331	287,5	315
480	—	—	476,85	483,15									326	351	307,5	335
500	—	—	496,85	503,15											327,5	355

NOTE Popular lengths are defined in terms of  $l_s$  and  $l_g$ :

- for product grade A, above the dashed, stepped line;
- for product grade B, below this stepped line.

<sup>a</sup>  $p$  is the pitch of the thread.

<sup>b</sup> For lengths  $l_{nom} \leq 125$  mm.

<sup>c</sup> For lengths  $125 \text{ mm} < l_{nom} \leq 200$  mm.

<sup>d</sup> For lengths  $l_{nom} > 200$  mm.

<sup>e</sup>  $k_{w, min} = 0,7 k_{min}$

<sup>f</sup>  $l_{g, max} = l_{nom} - b$

$l_{s, min} = l_{g, max} - 5P$

<sup>g</sup>  $l_g$  is the minimum grip length.

## 4 Specifications and reference standards

See Table 3.

**Table 3 — Specifications and reference standards**

Material		Steel	Stainless steel	Non-ferrous metal
<b>General requirements</b>	International Standard	ISO 8992		
<b>Thread</b>	Tolerance	6g		
	International Standards	ISO 724, ISO 965-1		
<b>Mechanical properties</b>	Property class <sup>a</sup>	$d < 3$ mm: as agreed $3 \text{ mm} \leq d \leq 39$ mm: 5.6, 8.8, 9.8, 10.9 $d > 39$ mm: as agreed	$d \leq 24$ mm: A2-70, A4-70 $24 \text{ mm} < d \leq 39$ mm: A2-50, A4-50 $d > 39$ mm: as agreed	Materials specified in ISO 8839
	International Standards	$3 \text{ mm} \leq d \leq 39$ mm: ISO 898-1 $d < 3$ mm and $d > 39$ mm: as agreed	$d \leq 39$ mm: ISO 3506-1 $d > 39$ mm: as agreed	
<b>Tolerances</b>	Product grade	For $d \leq 24$ mm and $l \leq 10 d$ or 150 mm <sup>b</sup> : A For $d > 24$ mm or $l > 10 d$ or 150 mm <sup>b</sup> : B		
	International Standard	ISO 4759-1		
<b>Finish and/or coating</b>		As processed  Requirements for electroplating are covered in ISO 4042  Requirements for non-electrolytically applied zinc flake coatings are covered in ISO 10683  If different electroplating requirements are desired or if requirements are needed for other finishes, they should be agreed between customer and supplier.  Limits for surface discontinuities are covered in ISO 6157-1	Plain	Plain  Requirements for electroplating are covered in ISO 4042
<b>Acceptability</b>		For acceptance procedure, see ISO 3269.		
<sup>a</sup> For other property classes see ISO 898-1 for steel and ISO 3506-1 for stainless steel respectively. <sup>b</sup> Whichever is shorter.				

## 5 Designation

### EXAMPLE

A hexagon head bolt with thread M12, nominal length  $l = 80$  mm and property class 8.8 is designated as follows:

**Hexagon head bolt ISO 4014 - M12 × 80 - 8.8**

## Bibliography

- [1] ISO 4015:1979, *Hexagon head bolts — Product grade B — Reduced shank (shank diameter approximately equal to pitch diameter)*.
- [2] ISO 4016:1999, *Hexagon head bolts — Product grade C*.
- [3] ISO 4017:1999, *Hexagon head screws — Product grades A and B*.
- [4] ISO 4018:1999, *Hexagon head screws — Product grade C*.
- [5] ISO 4032:1999, *Hexagon nuts, style 1 — Product grades A and B*.
- [6] ISO 4033:1999, *Hexagon nuts, style 2 — Product grades A and B*.
- [7] ISO 4034:1999, *Hexagon nuts — Product grade C*.
- [8] ISO 4035:1999, *Hexagon thin nuts (chamfered) — Product grades A and B*.
- [9] ISO 4036:1999, *Hexagon thin nuts (unchamfered) — Product grade B*.
- [10] ISO 4161:1999, *Hexagon nuts with flange — Coarse thread*.
- [11] ISO 4162:—<sup>5)</sup>, *Hexagon bolts with flange — Small series — Product grade combination A/B*.
- [12] ISO 4775:1984, *Hexagon nuts for high-strength structural bolting with large width across flats — Product grade B — Property classes 8 and 10*.
- [13] ISO 7411:1984, *Hexagon bolts for high-strength structural bolting with large width across flats (thread lengths according to ISO 888) — Product grade C — Property classes 8.8 and 10.9*.
- [14] ISO 7412:1984, *Hexagon bolts for high-strength structural bolting with large width across flats (short thread length) — Product grade C — Property classes 8.8 and 10.9*.
- [15] ISO 7413:1984, *Hexagon nuts for structural bolting, style 1, hot-dip galvanize (oversize tapped) — Product grades A and B — Property classes 5, 6 and 8*.
- [16] ISO 7414:1984, *Hexagon nuts for structural bolting with large width across flats, style 1 — Product grade B — Property class 10*.
- [17] ISO 7417:1984, *Hexagon nuts for structural bolting, style 2, hot-dip galvanize (oversize tapped) — Product grade A — Property class 9*.
- [18] ISO 8673:1999, *Hexagon nuts, style 1, with metric fine pitch thread — Product grades A and B*.
- [19] ISO 8674:1999, *Hexagon nuts, style 2, with metric fine pitch thread — Product grades A and B*.
- [20] ISO 8675:1999, *Hexagon thin nuts (chamfered) with metric fine pitch thread — Product grades A and B*.
- [21] ISO 8676:1999, *Hexagon head screws with metric fine pitch thread — Product grades A and B*.

---

<sup>5)</sup> To be published. (Revision of ISO 4162:1990)

[22] ISO 8765:1999, *Hexagon head bolts with metric fine pitch thread — Product grades A and B.*

[23] ISO 10663:1999, *Hexagon nuts with flange — Fine pitch thread.*

[24] ISO 15071:1999, *Hexagon bolts with flange — Small series — Product grade A.*